
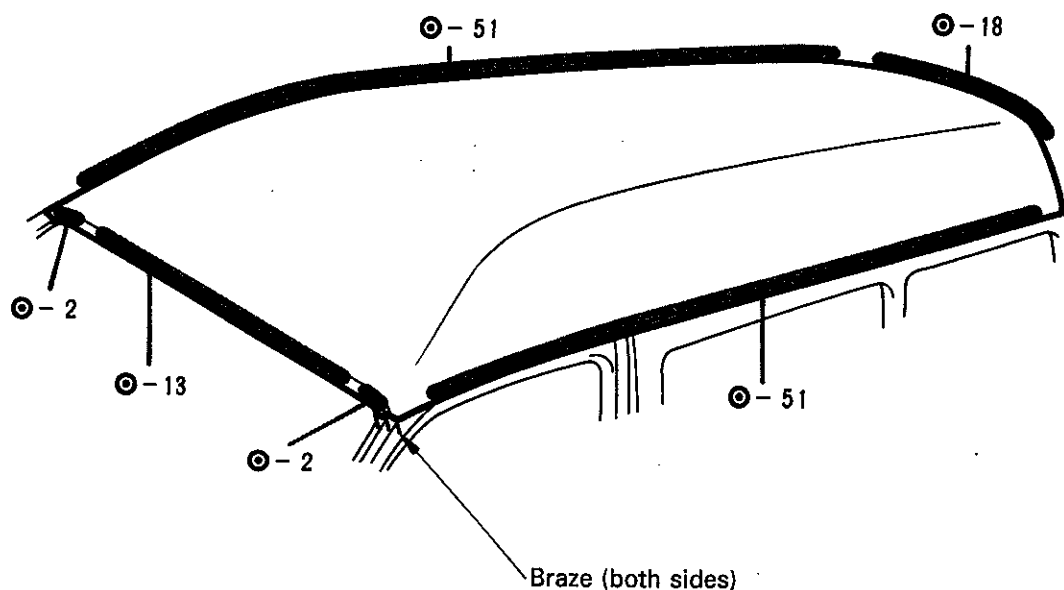
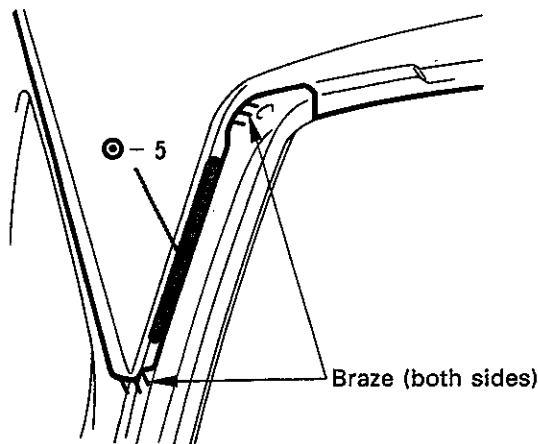


## ROOF PANEL (ASSY): Long Wheel Base and High Roof


### REMOVAL

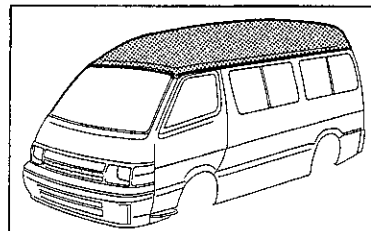

1. Heat the brazed areas of the front body pillar, quarter panel and back door opening side flange and scrape off the brazing with a wire brush.

**NOTICE:** Be careful not overheat the brazed areas.

## INSTALLATION

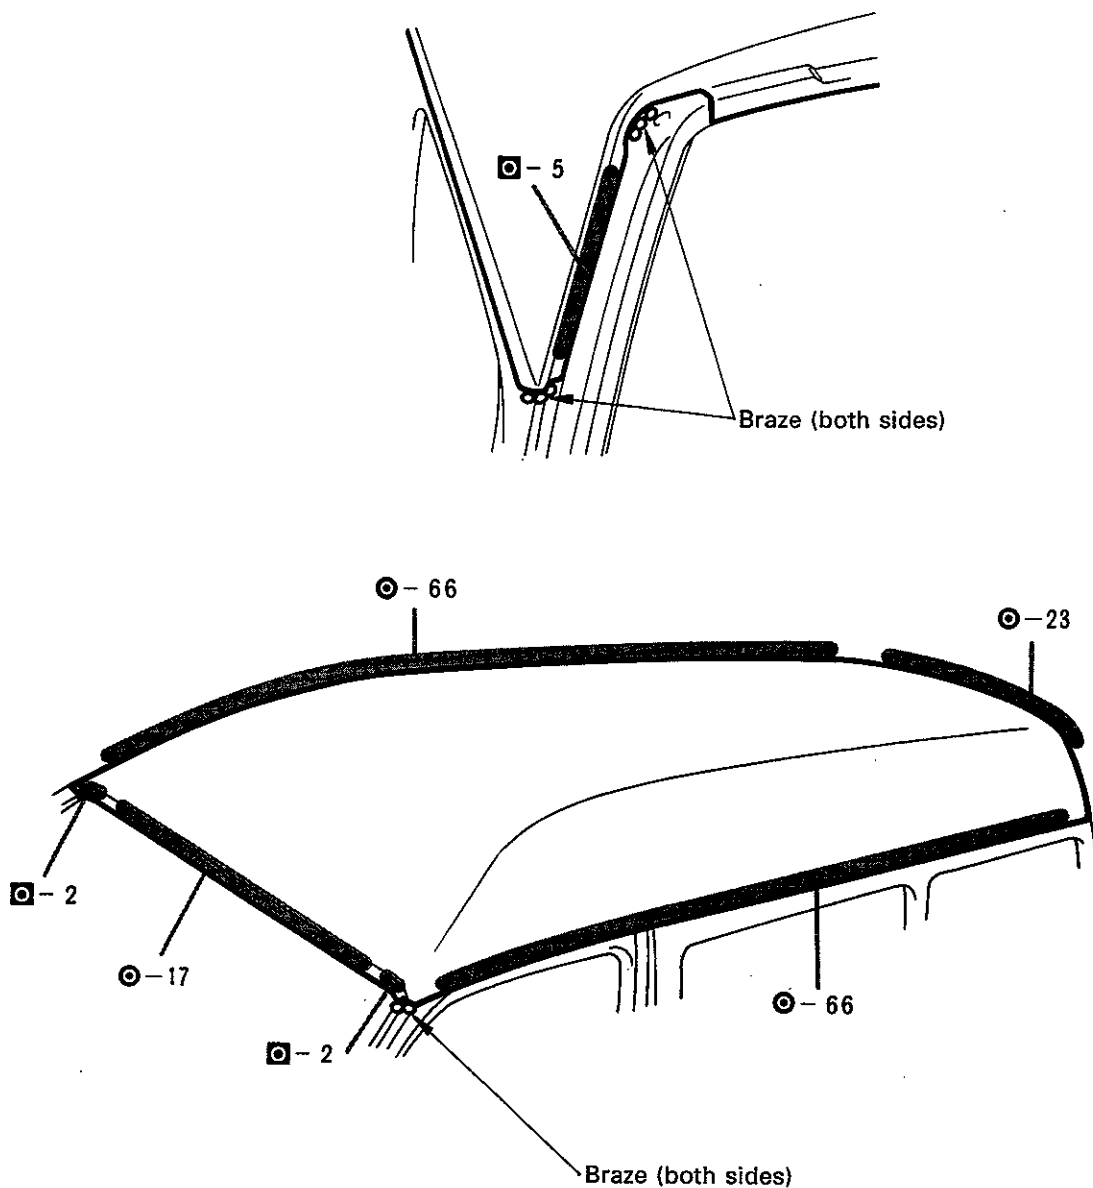

1. Braze the front body pillar, quarter panel and back door opening side flame connections.

**NOTICE:** Before performing these operations, place a wet rag on the roof panel to protect it from damage.