





QUARTER PANEL (CUT): Without Slide Door Side (Long Wheel Base and Glass Van)

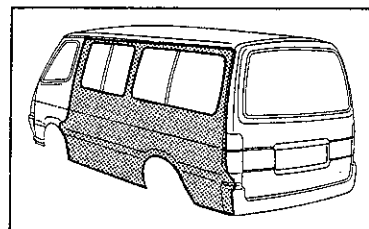

REMOVAL

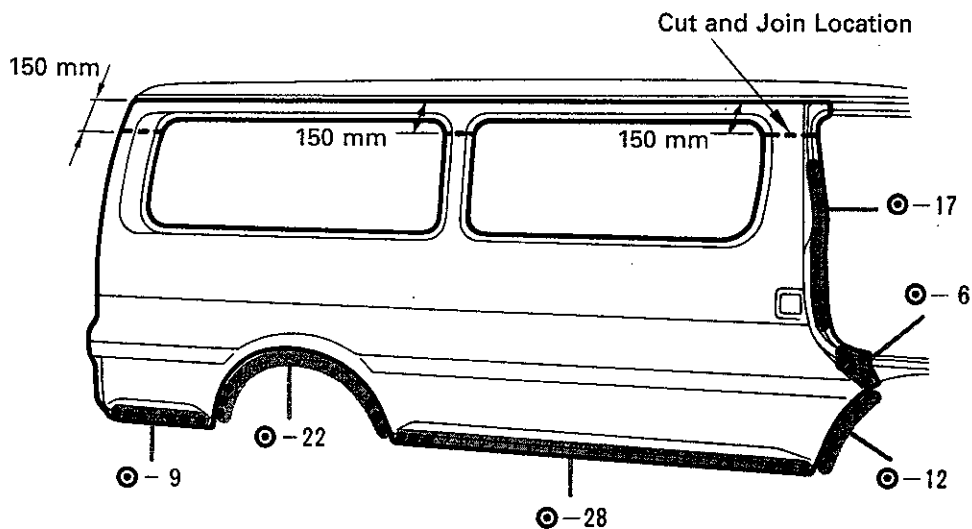



[Cut and Join Location]

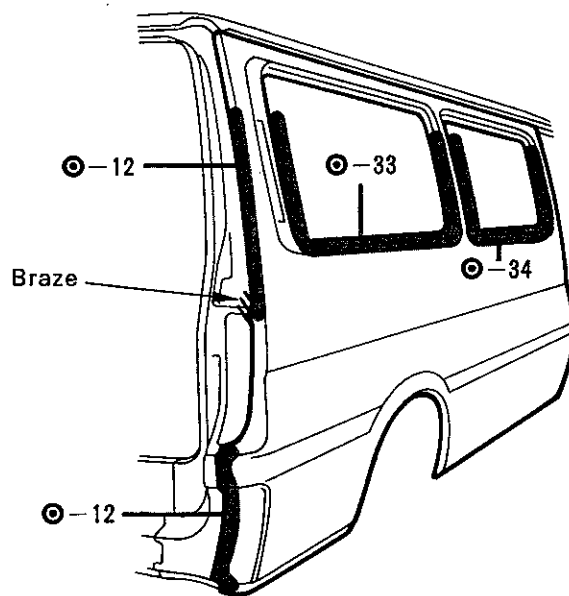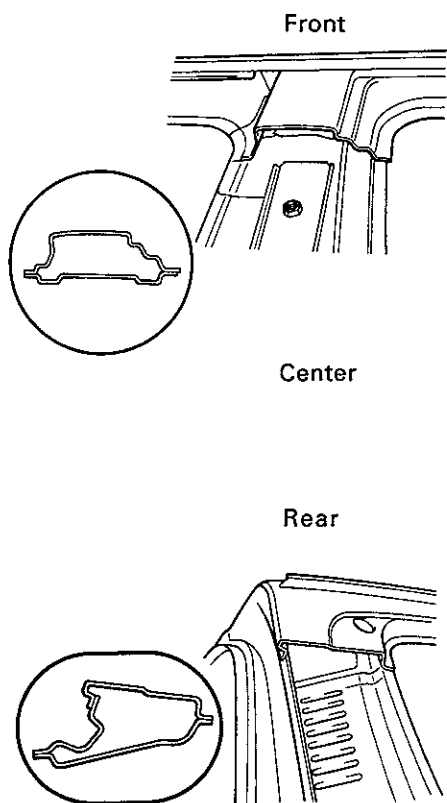

mm	in.
150	5.91

1. Cut and join the parts at the locations shown above.

INSTALLATION

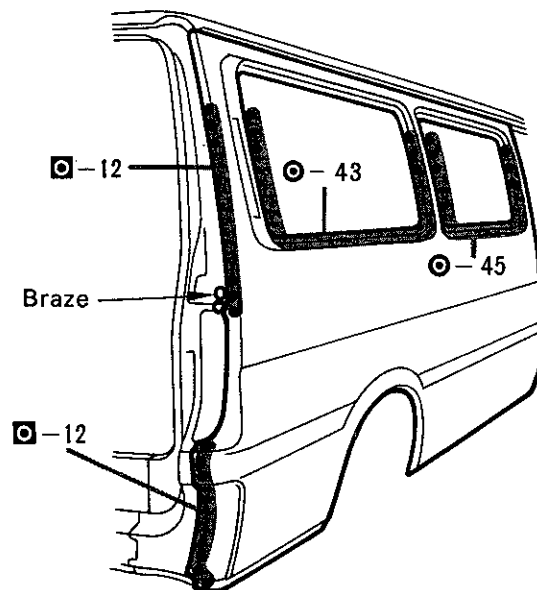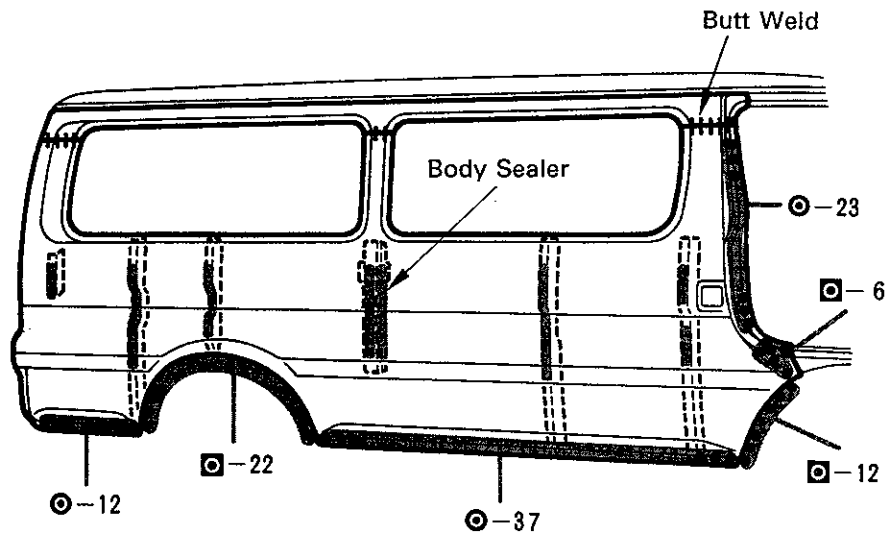

1. Before temporarily installing the new parts, apply body sealer to the locations shown above.
2. Temporarily install the new parts and check the fit of the front door, back door and rear combination light.

HINT:

- 1) Apply just enough sealer for the new parts to make contact.
- 2) For other sealing points, refer to section AR.