


Body Dimension Drawings

BODY OPENING AREAS (Front and Side View)

(Three-Dimensional Distance)

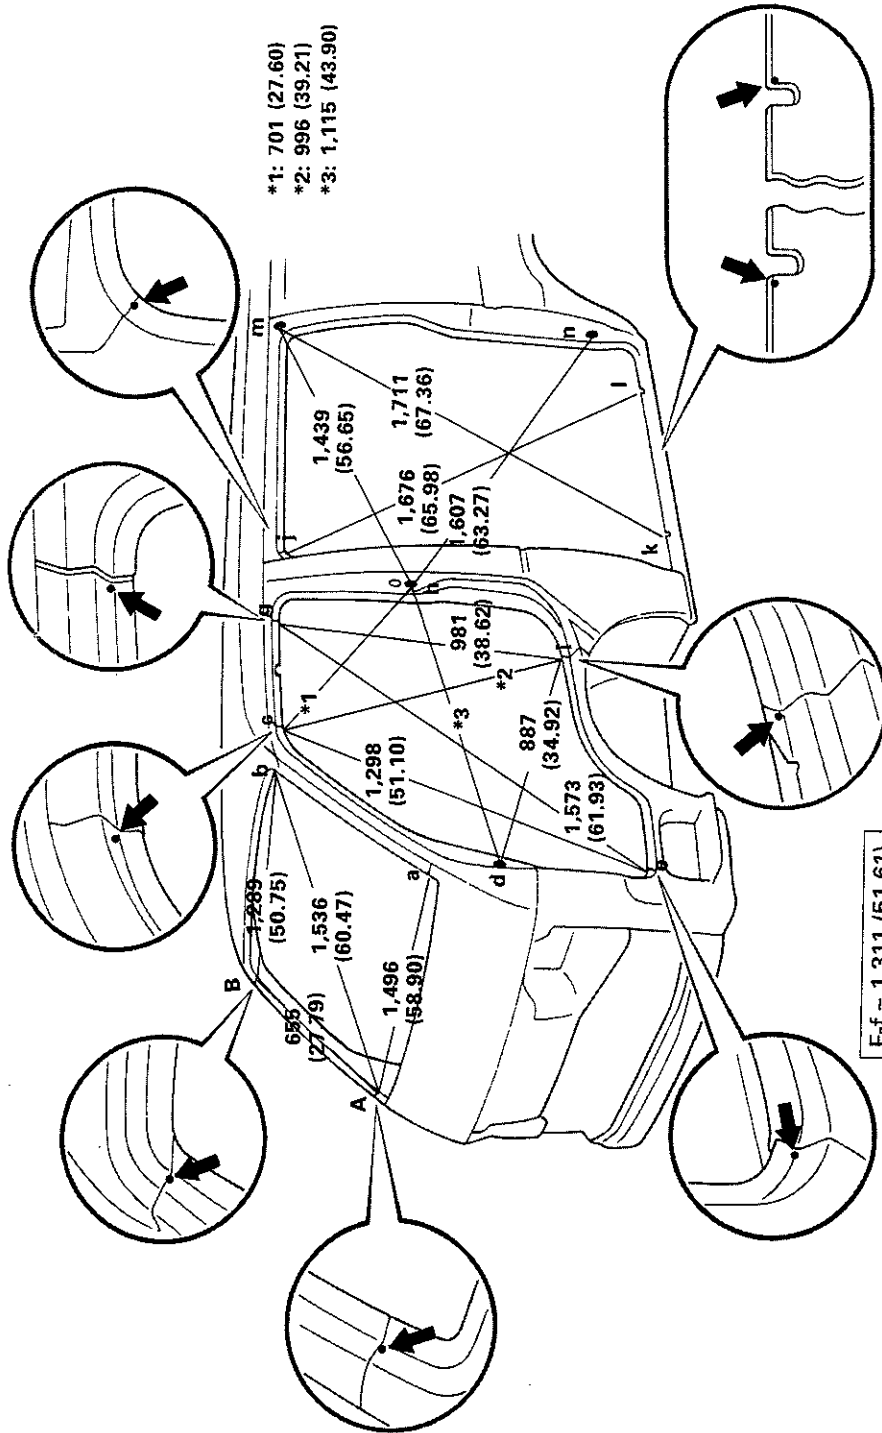


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front panel/Front body pillar adjoining portion	—	H, h	Courtesy switch installation nut	6 (0.24) nut
B, b	Roof panel/Front body pillar adjoining portion	—	I, i	Center body pillar/Fender panel adjoining portion	—
C, c	Front body pillar/Roof side rail adjoining portion	—	J, j	Center body pillar/Roof side rail adjoining portion	—
D, d	Front body pillar standard hole	11 (0.43)	K, k	Rocker panel assembly mark	—
E, e	Front body pillar/Front step panel adjoining portion	—	L, l	Rocker panel assembly mark	—
F, f	Roof side rail assembly mark	—	M, m	Rear door cushion installation hole	9 (0.35)
G, g	Center body pillar/Roof side rail adjoining portion	—	N, n	Rear door cushion installation hole	9 (0.35)


BODY OPENING AREAS (Rear View)

(Three-Dimensional Distance)

High Roof

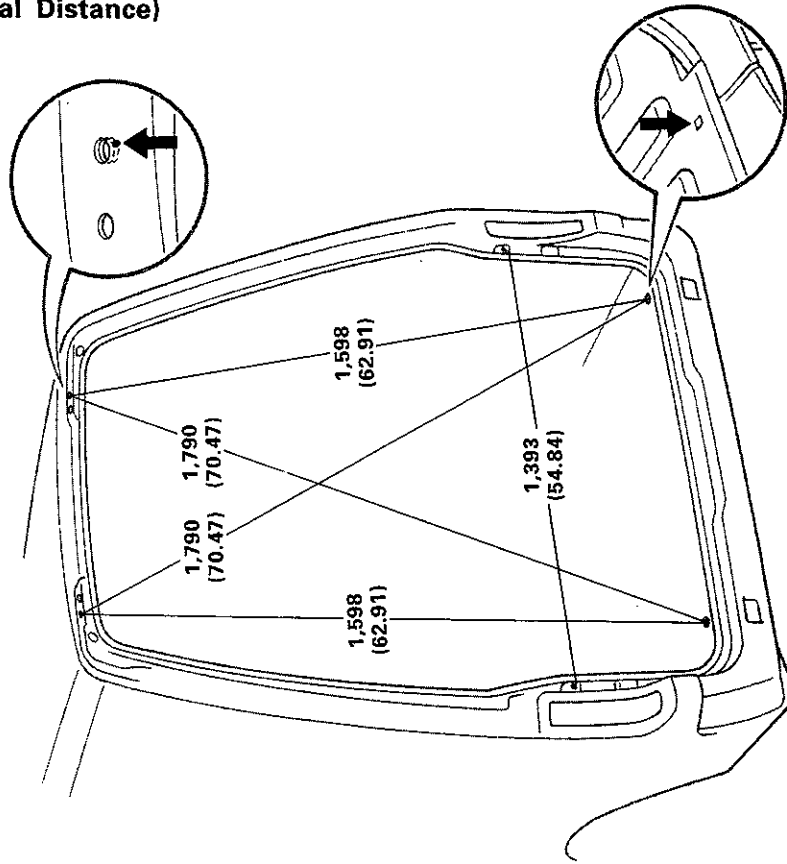



Standard Roof

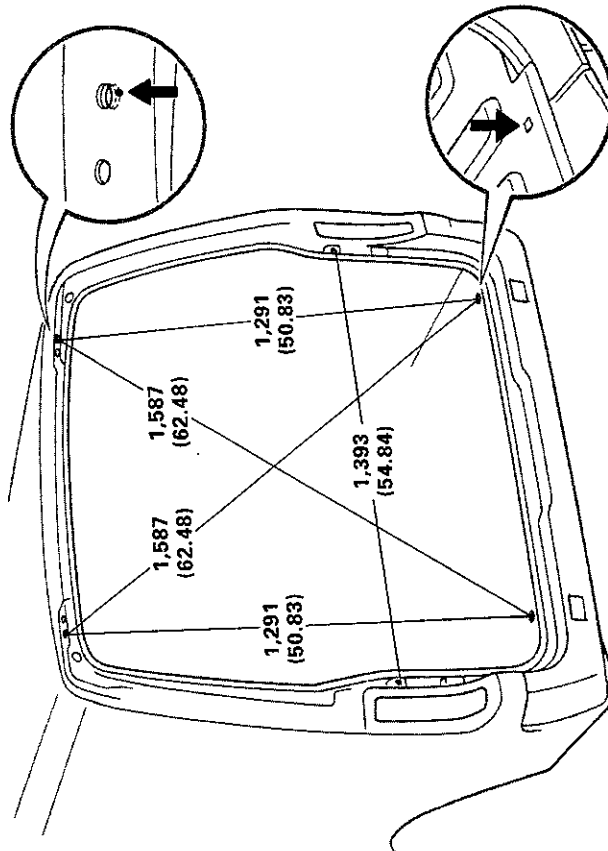BO4430
BO4429

mm (in.)

Symbol	Name	Hole dia.
O, o	Back door hinge installation hole-outer : rear end -	RH 8.2x9 (0.323x0.35) LH 8.2 (0.323)
P, p	Rear combination light installation hole	9 (0.35)
Q, q	Back door scuff plate installation hole	9 (0.35)



(Three-Dimensional Distance)

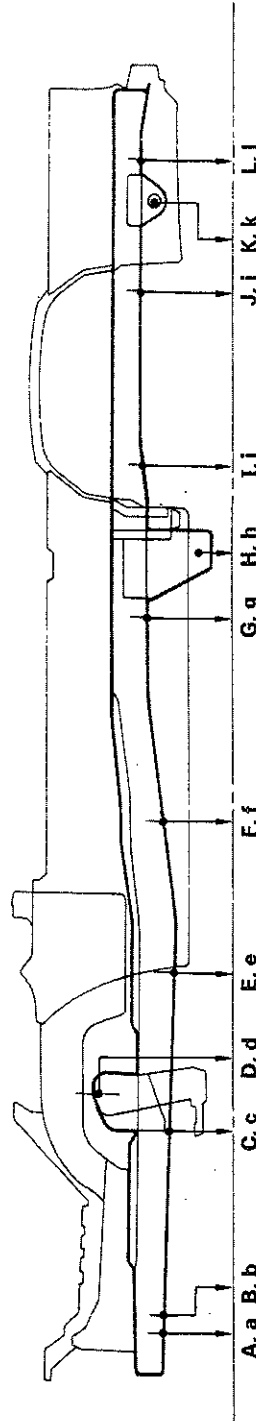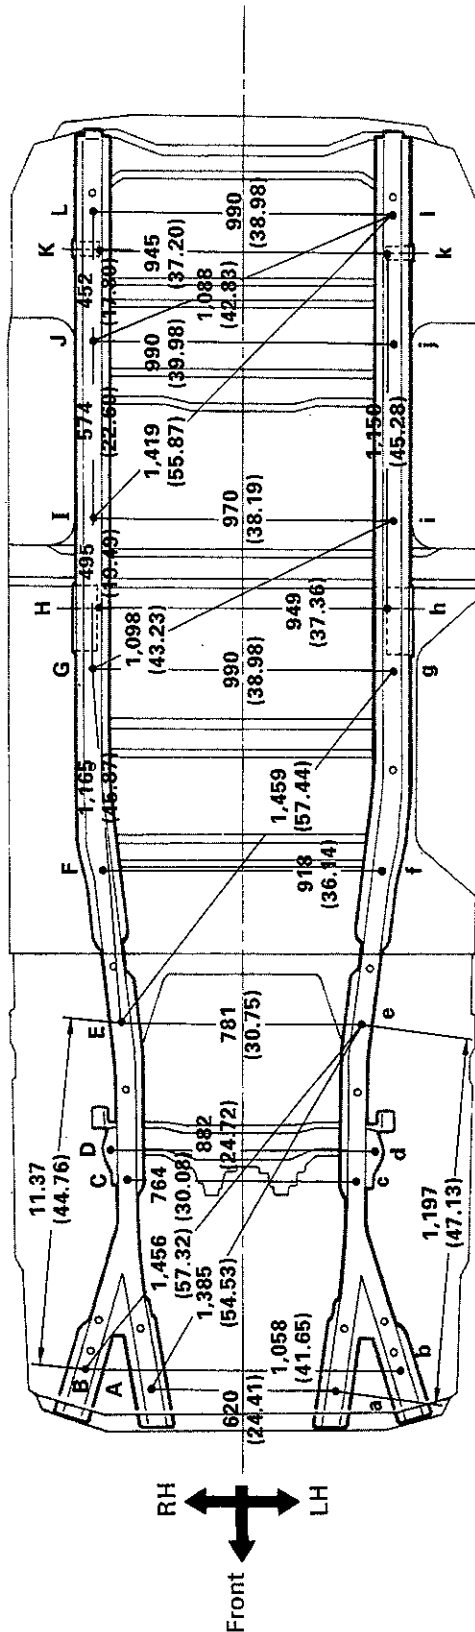

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	17 (0.67)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55) nut	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)

UNDER BODY (2WD : Short Wheel Base)

(Two-Dimensional Distance)

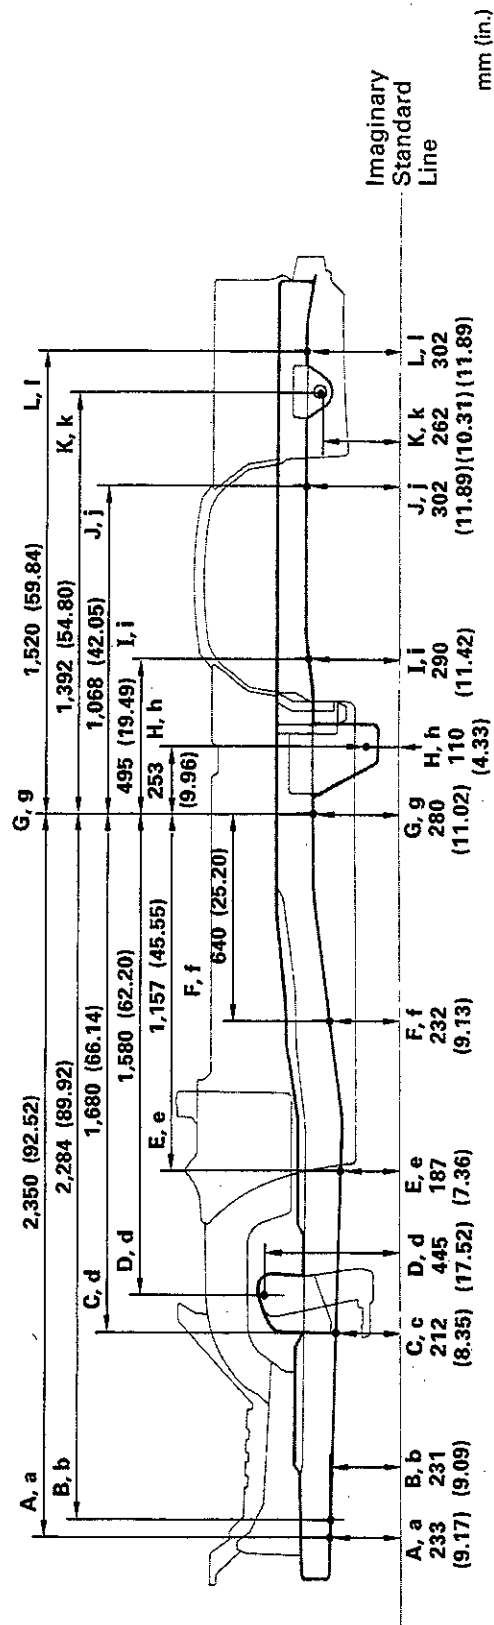
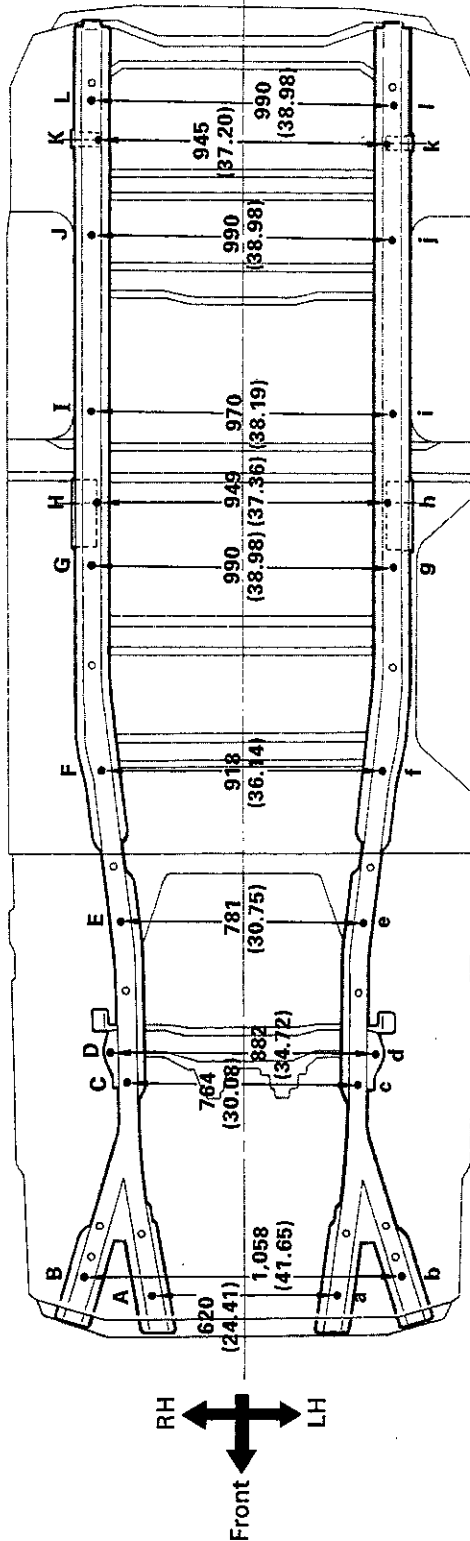


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front-side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	17 (0.67)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55) nut	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)

BO4431

UNDER BODY (4WD : Short Wheel Base)

(Three-Dimensional Distance)

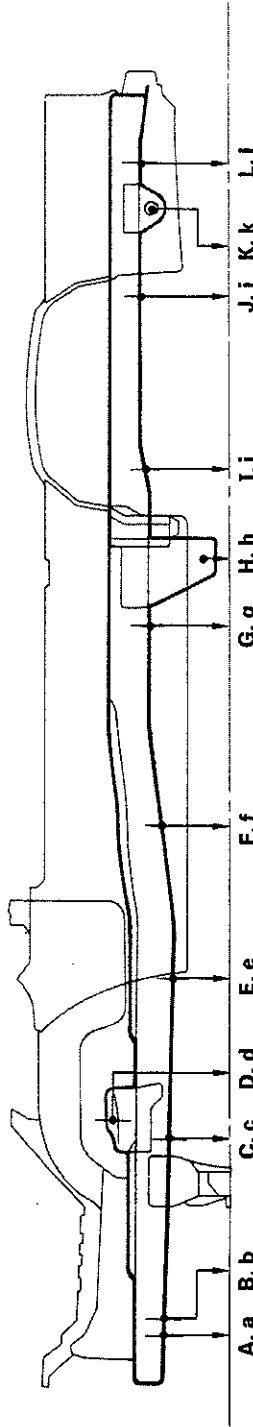
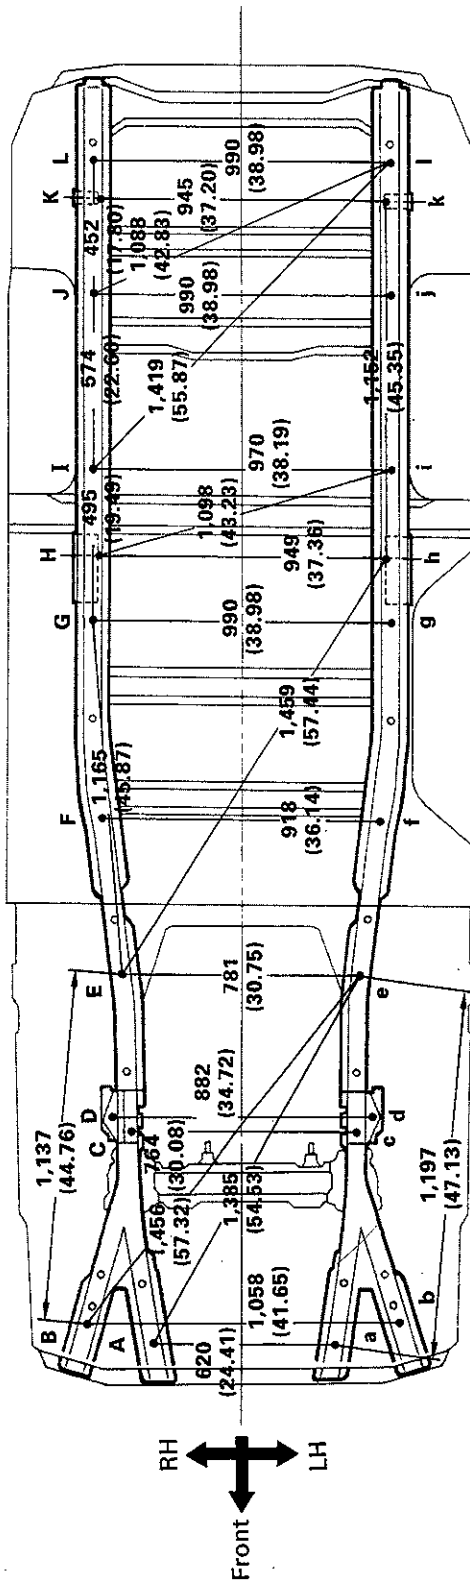


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	16 (0.63)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55)	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)

UNDER BODY (4WD : Short Wheel Base)

(Two-Dimensional Distance)

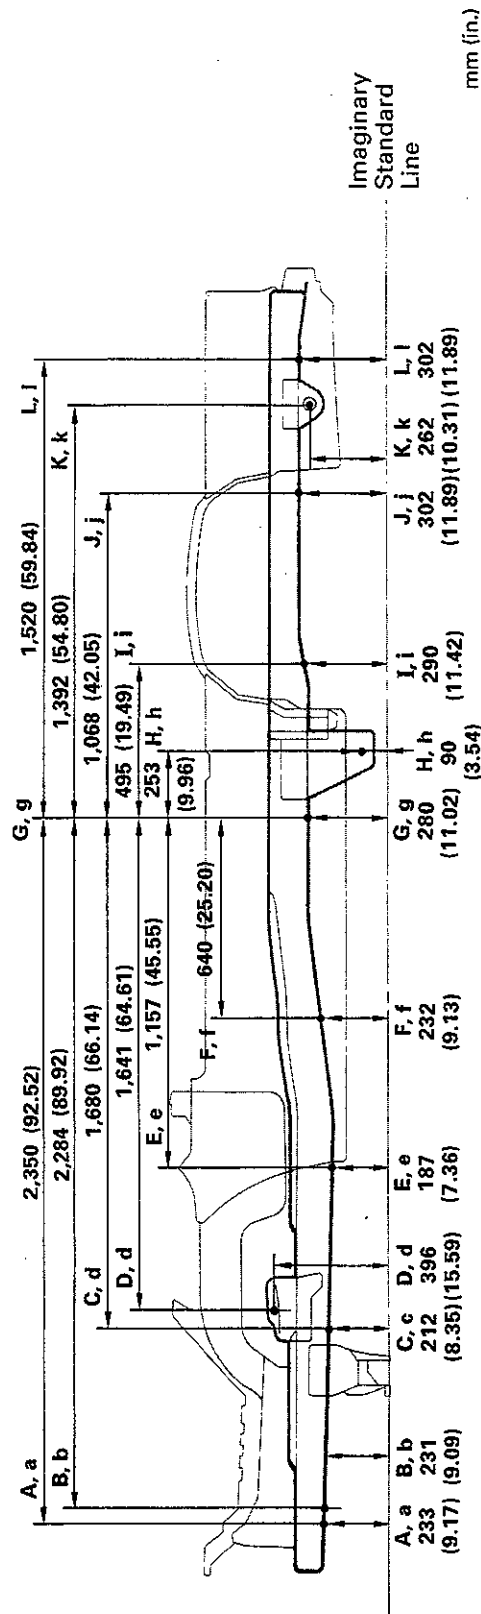
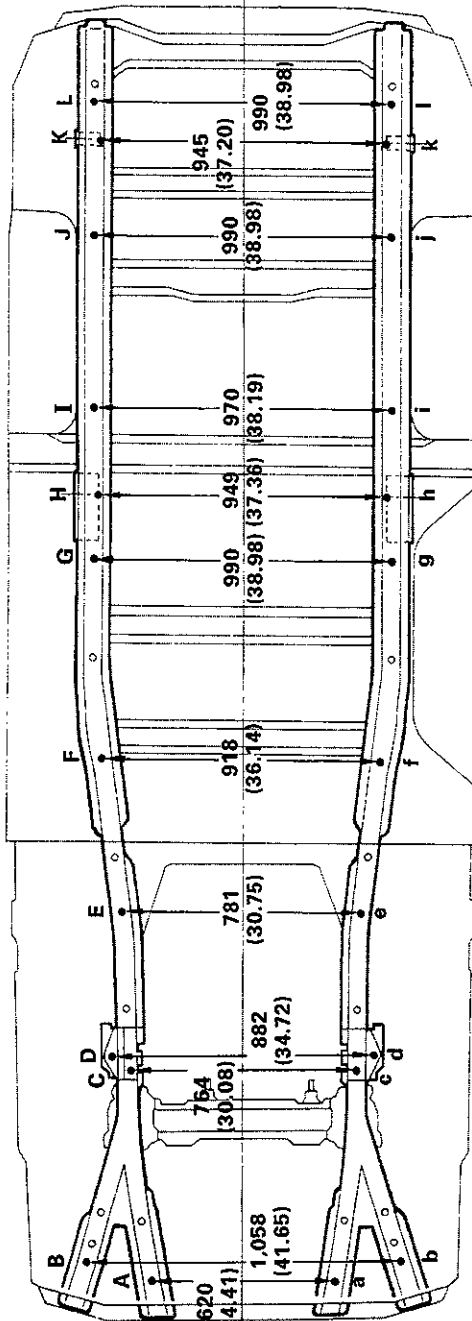


BO4432

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	16 (0.63)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55) nut	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)

UNDER BODY (2WD : Long Wheel Base)

(Three-Dimensional Distance)

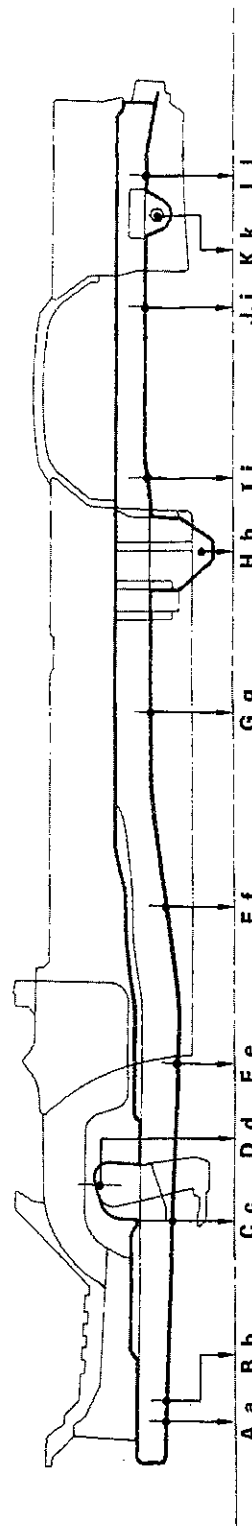
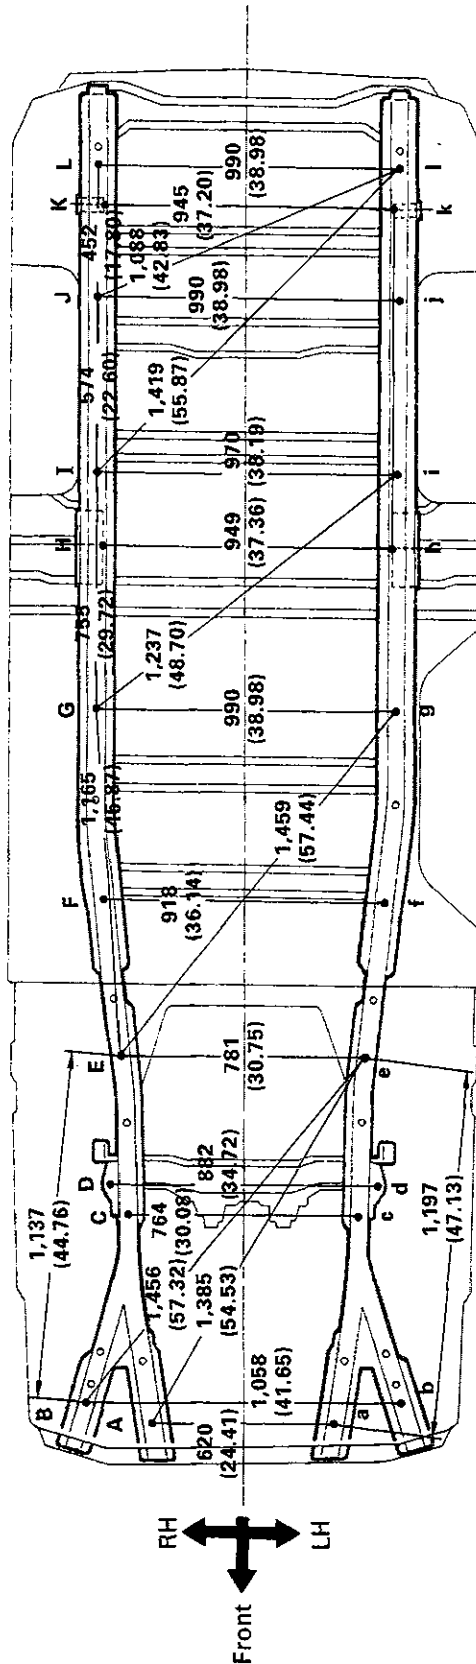


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	17 (0.67)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55) nut	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)

UNDER BODY (2WD : Long Wheel Base)

(Two-Dimensional Distance)

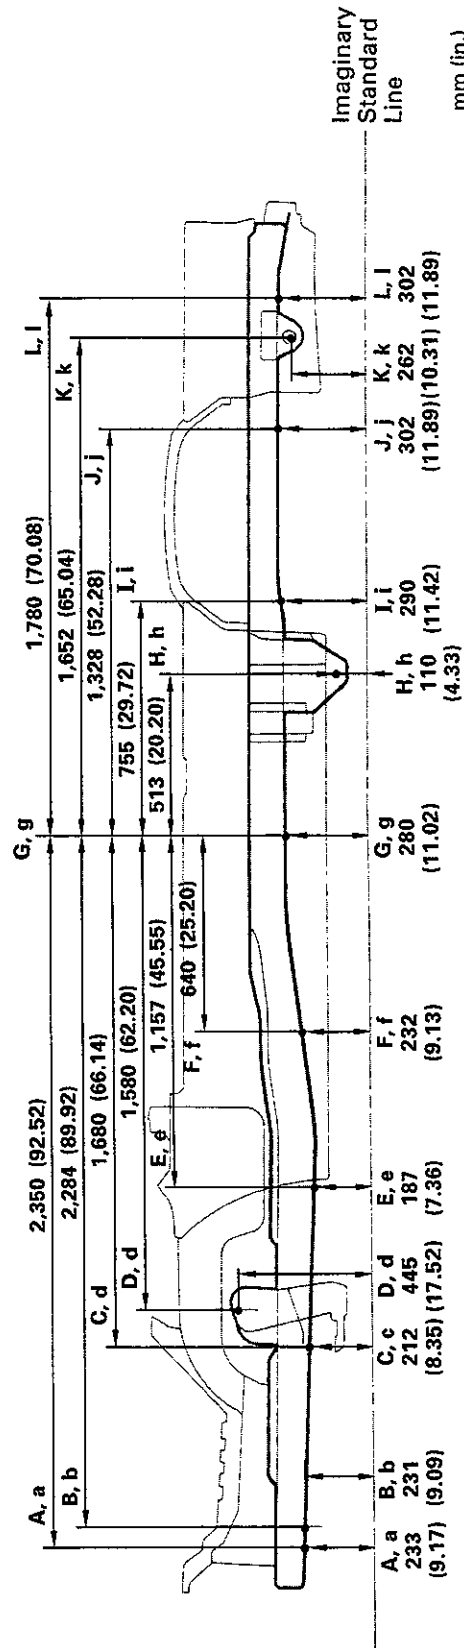
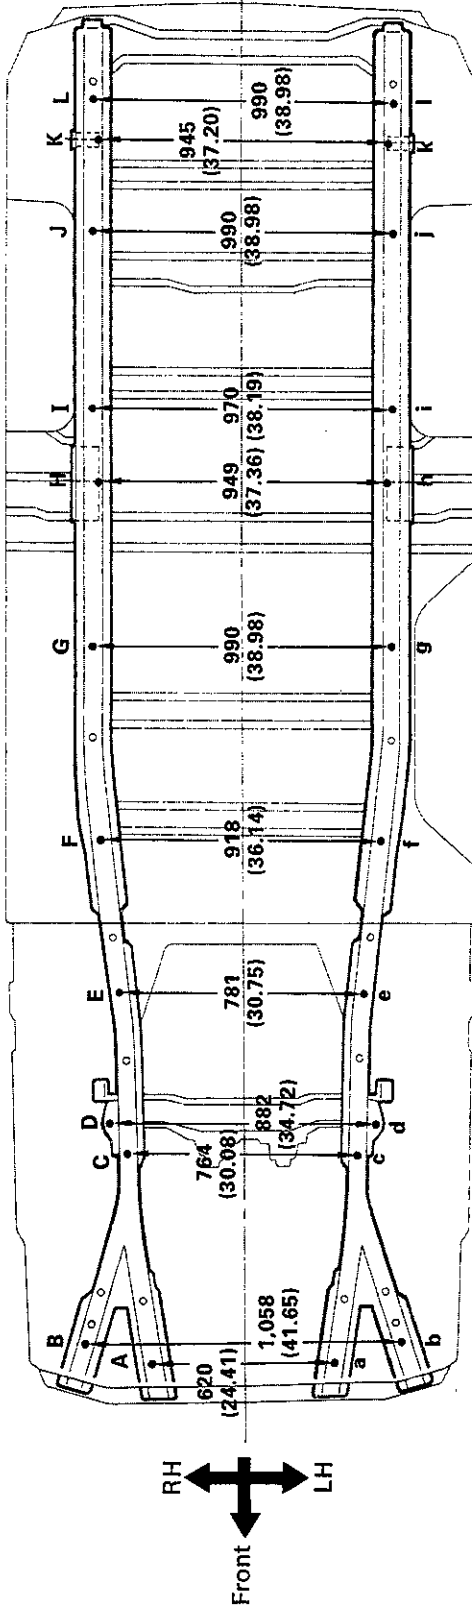


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	17 (0.67)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55)	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)

BO4433

UNDER BODY (4WD : Long Wheel Base)

(Three-Dimensional Distance)

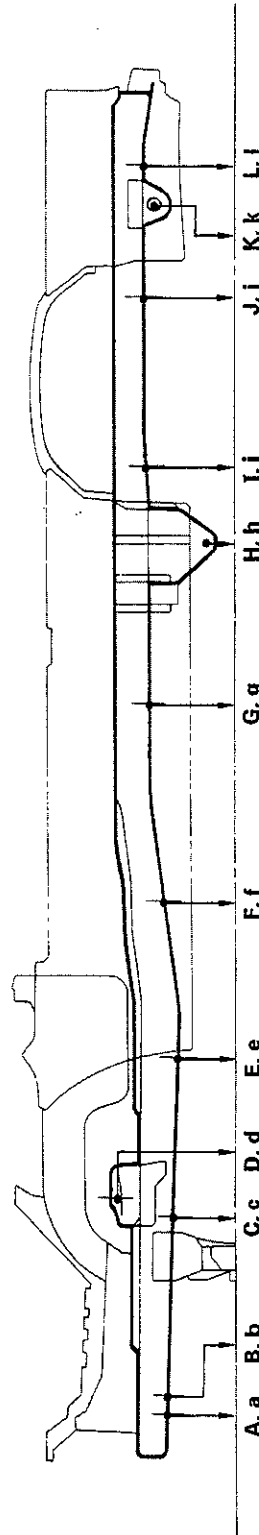
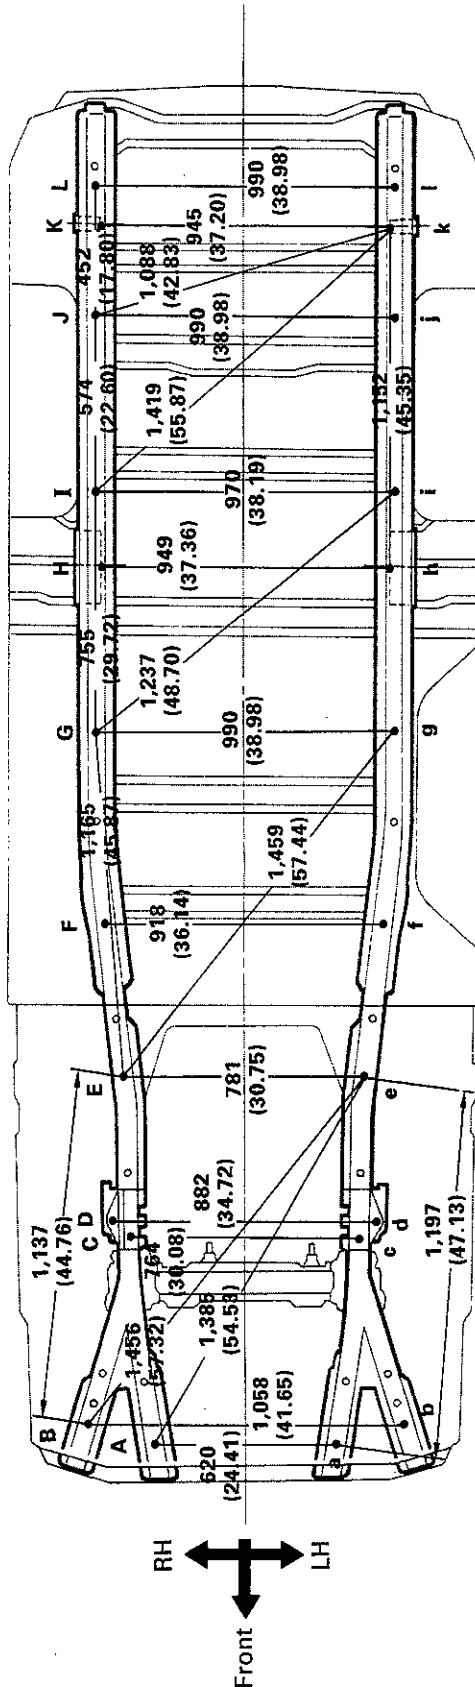


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	16 (0.63)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55) nut	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)

UNDER BODY (4WD : Long Wheel Base)

(Two-Dimensional Distance)

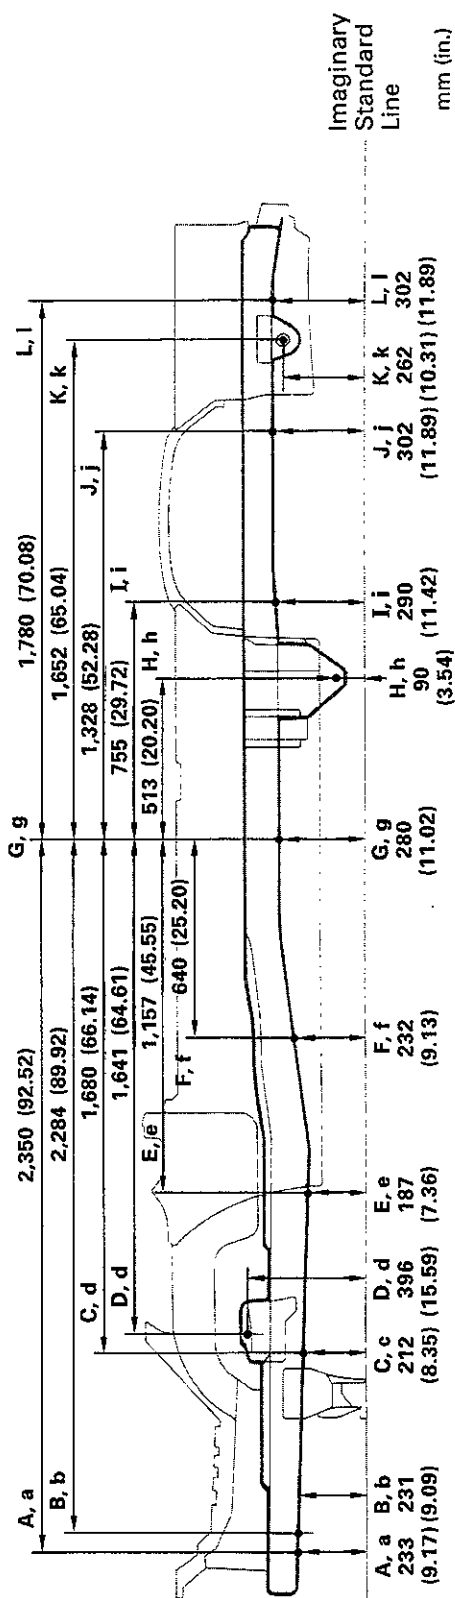
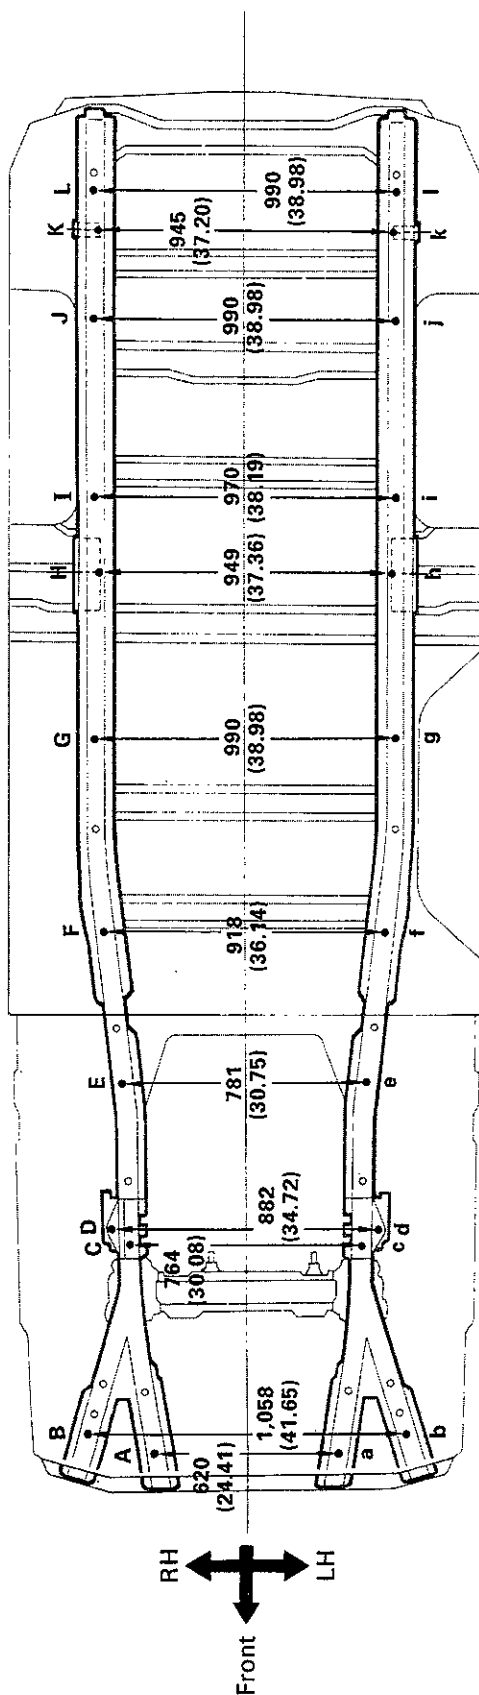


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front-side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	16 (0.63)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55) nut	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)

BO4434

UNDER BODY (2WD : Super Long Wheel Base)

(Three-Dimensional Distance)

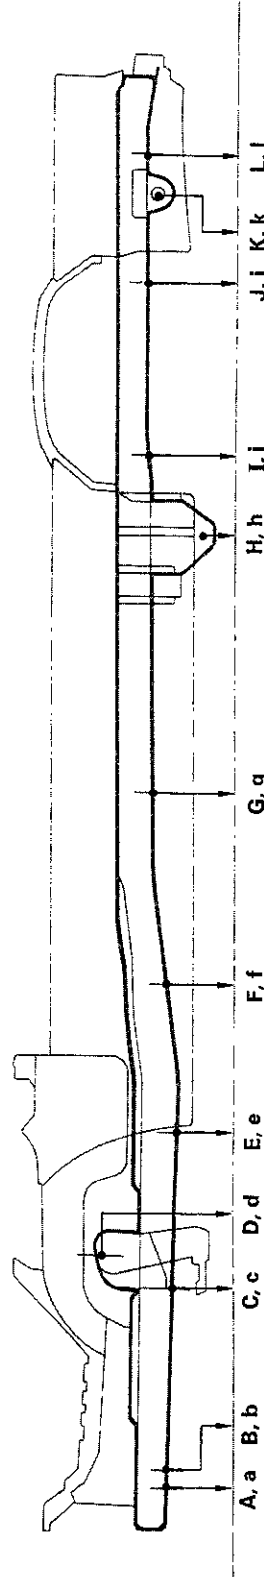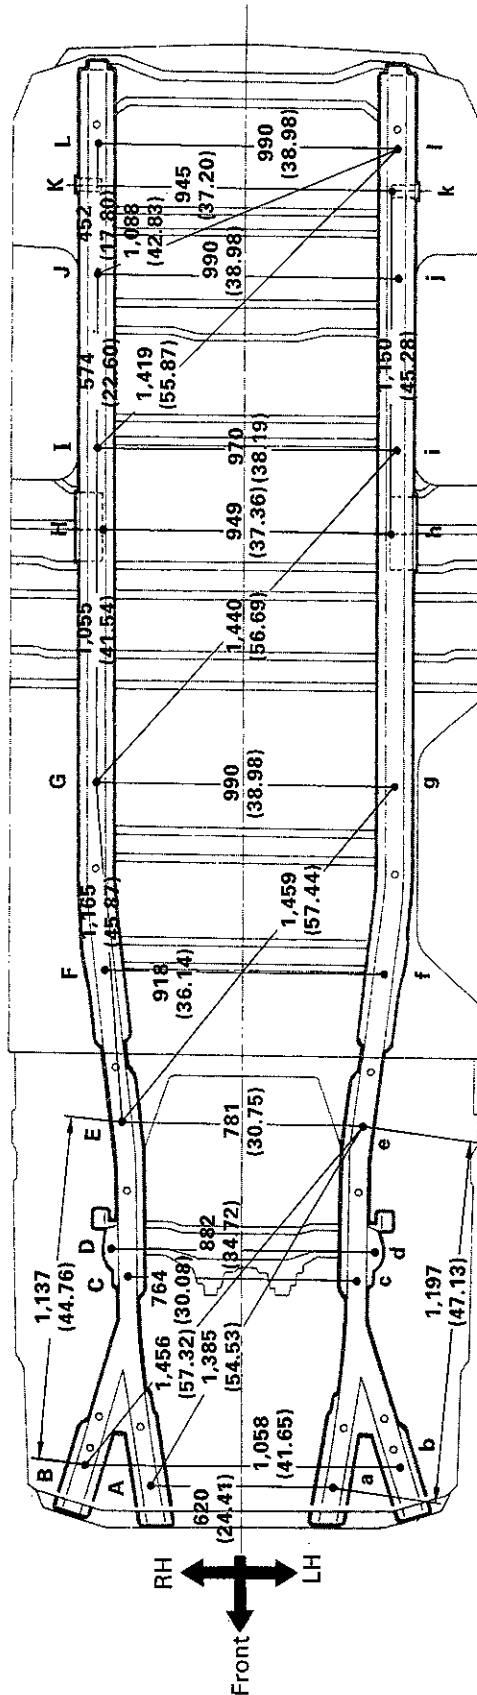


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	17 (0.67)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55) nut	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)

BO4435

UNDER BODY (2WD : Super Long Wheel Base)

(Two-Dimensional Distance)

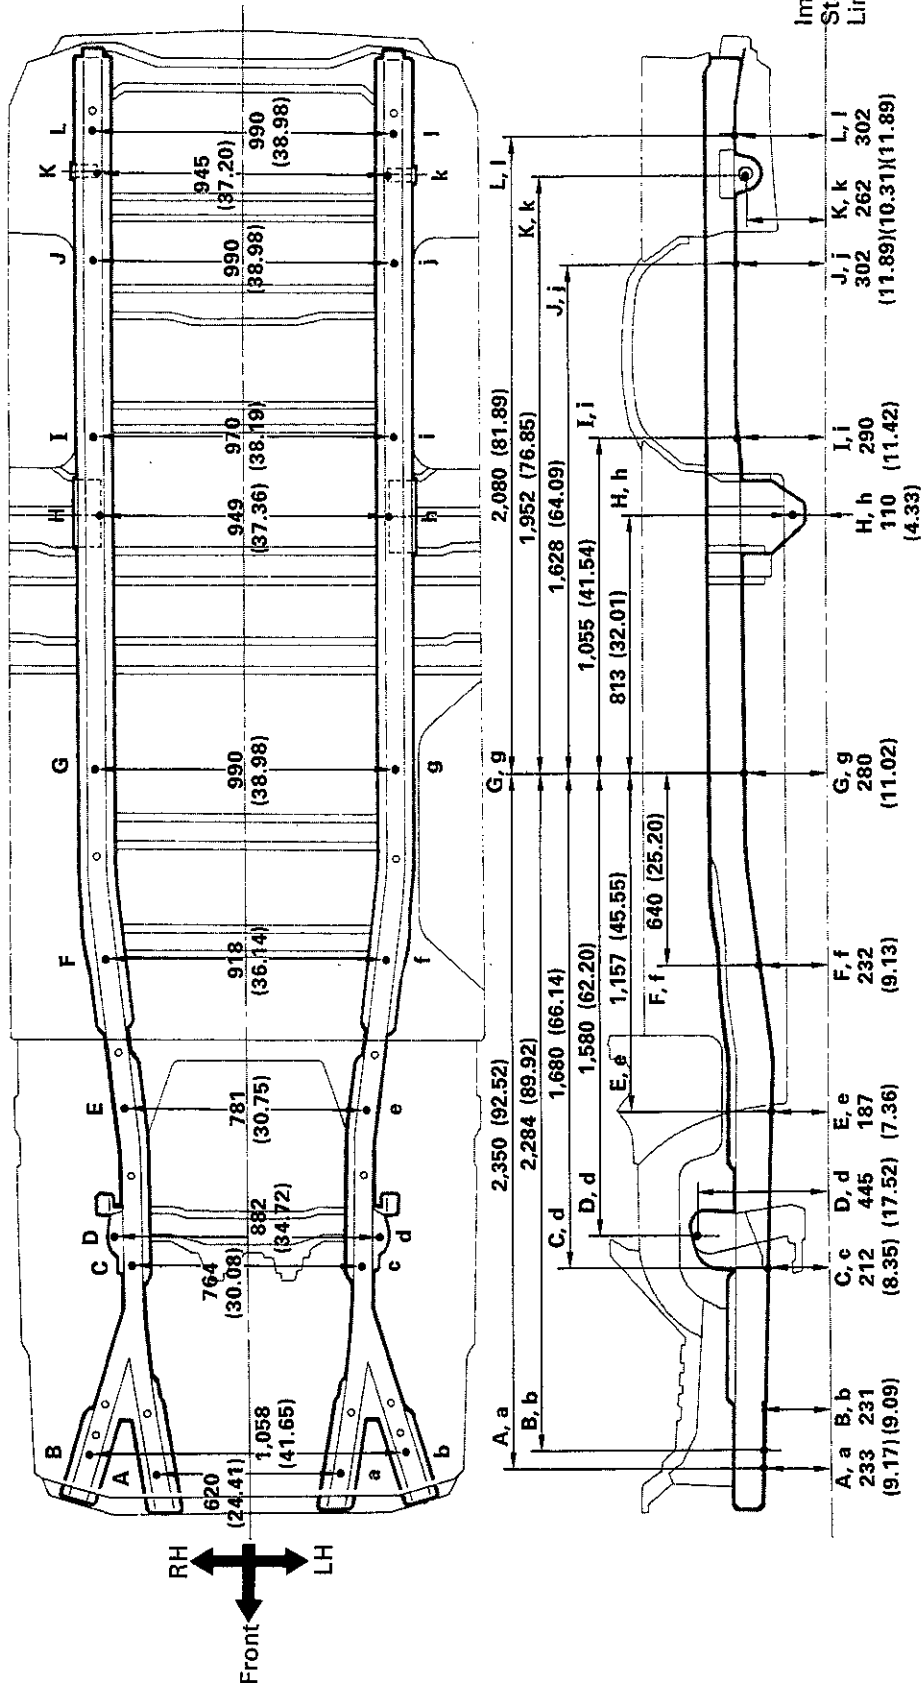

mm (in.)

804435

Wheel base 2,890 (113.78)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	17 (0.67)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55) nut	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)