

BODY DIMENSIONS

General Information

1. BASIC DIMENSIONS

- (a) There are two types of dimensions in the diagram.
(Three-dimensional distance)



- Straight-line distance between the centers of two measuring points.

(Two-dimensional distance)

- Horizontal distance in forward/rearward between the centers of two measuring points.
- The height from an imaginary standard line.


- (b) In cases in which only one dimension is given, left and right are symmetrical.

- (c) The dimensions in the following drawing indicate actual distance. Therefore, please use the dimensions as a reference.

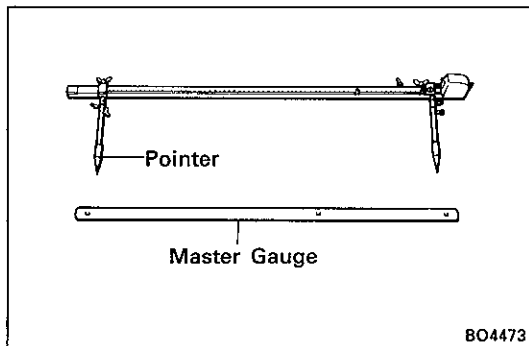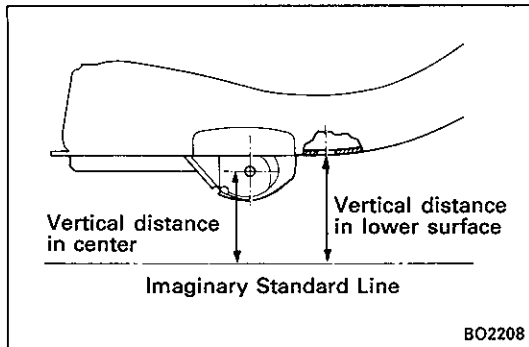

2. MEASURING

- (a) Basically, all measurements are to be done tracking gauge. For portions where it is not possible to use a tracking gauge, a tape measure should be used.
- (b) Use only tracking gauge that has no looseness in the body, measuring plate, or pointers.

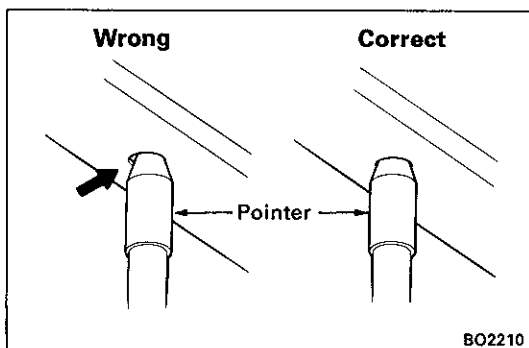


HINT:

1. The height of the left and right pointers must be equal.
 2. Always calibrate the tracking gauge before measuring or after adjusting the pointer height.
 3. Take care not to drop the tracking gauge or otherwise shock it.
 4. Confirm that the pointers are securely in the holes.
- (c) When using a tape measure, avoid twists and bends in the tape.

Body Dimensions

BODY OPENING AREAS (Front and Side View)

(Three-Dimensional Distance)

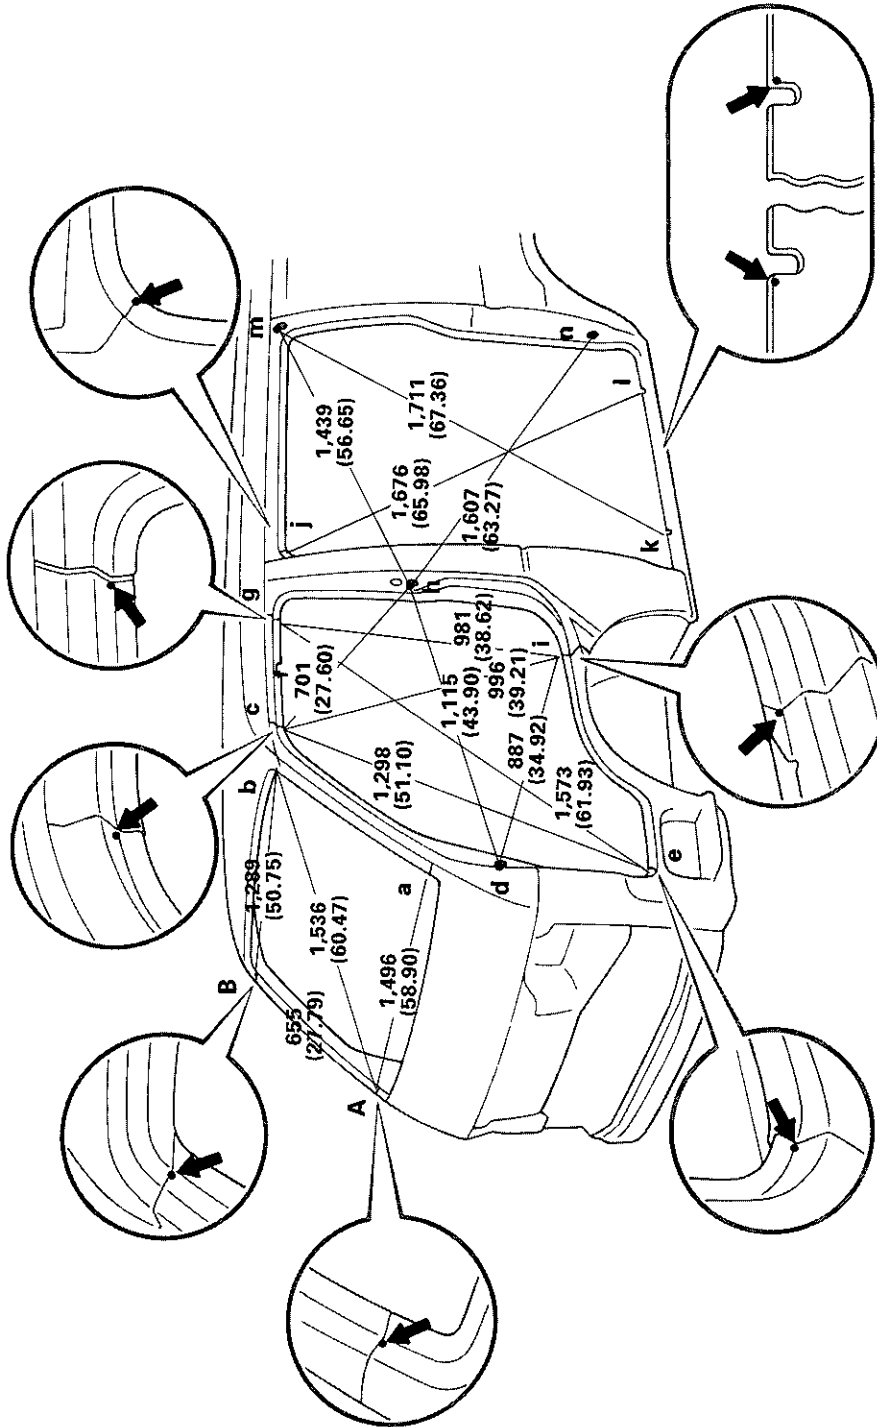

F-f=1,311 (51.61)


BO4428

Symbol	Name	Hole dia.	Symbol	Name	mm (in.)
A, a	Front panel/Front body pillar adjoining portion	—	H, h	Courtesy switch installation nut	6 (0.24) nut
B, b	Roof panel/Front body pillar adjoining portion	—	I, i	Center body pillar/Fender panel adjoining portion	—
C, c	Front body pillar/Roof side rail adjoining portion	—	J, j	Center body pillar/Roof side rail adjoining portion	—
D, d	Front body pillar standard hole	11 (0.43)	K, k	Rocker panel assembly mark	—
E, e	Front body pillar/Front step panel adjoining portion	—	L, l	Rocker panel assembly mark	—
F, f	Roof side rail assembly mark	—	M, m	Rear door cushion installation hole	9 (0.35)
G, g	Center body pillar/Roof side rail adjoining portion	—	N, n	Rear door cushion installation hole	9 (0.35)


BODY OPENING AREAS (Rear View)

(Three-Dimensional Distance)

High Roof

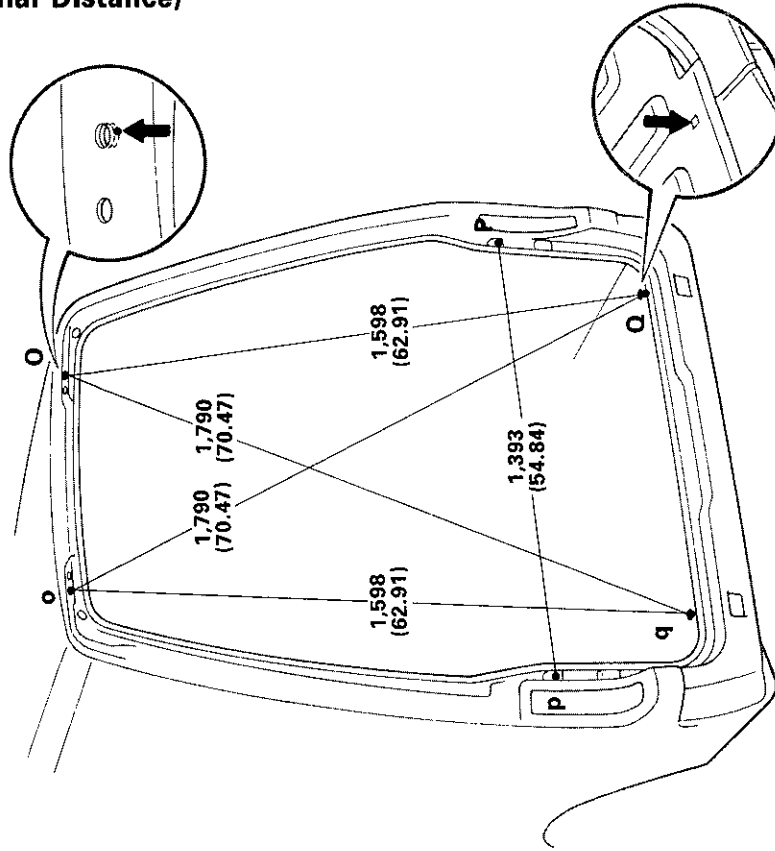

Standard Roof

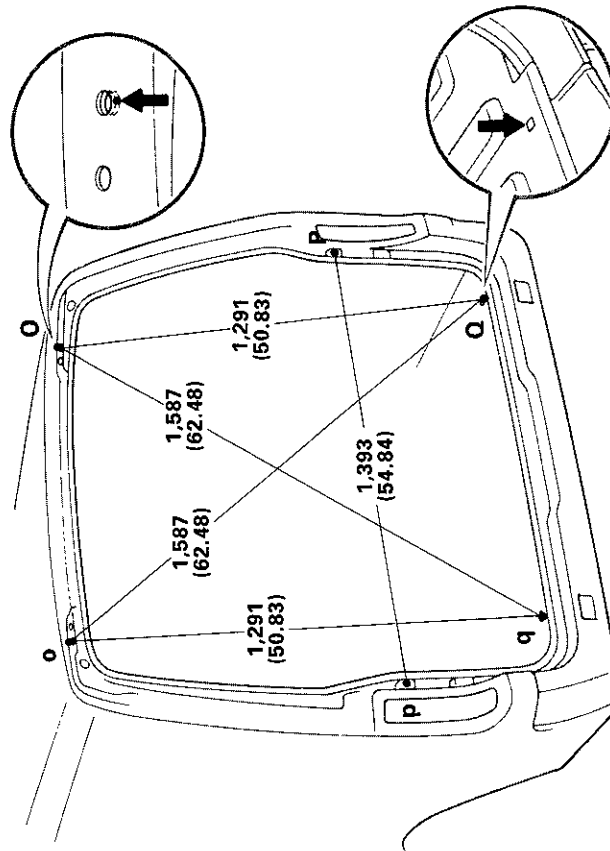



mm (in.)

BO4430
BO4429

Symbol	Name	Hole dia.
O, o	Back door hinge installation hole-outer: rear end -	RH 8.2x9 (0.323x0.35) LH 8.2 (0.323)
P, p	Rear combination light installation hole	9 (0.35)
Q, q	Back door scuff plate installation hole	9 (0.35)

UNDER BODY (2WD : Short Wheel Base)


(Three-Dimensional Distance)

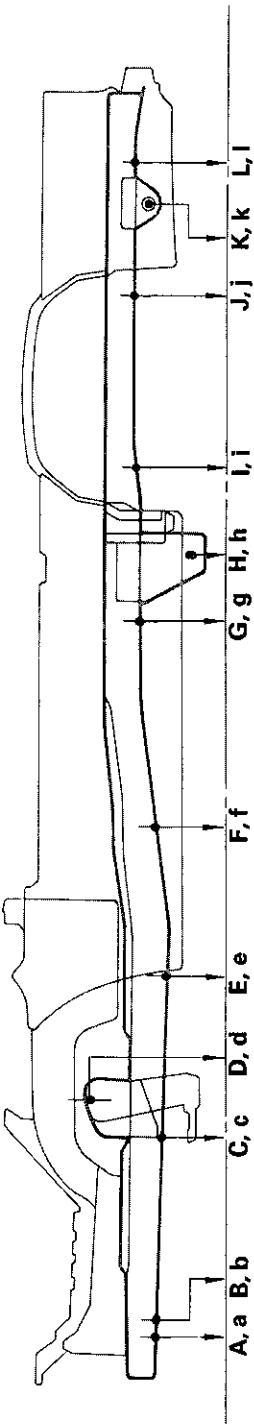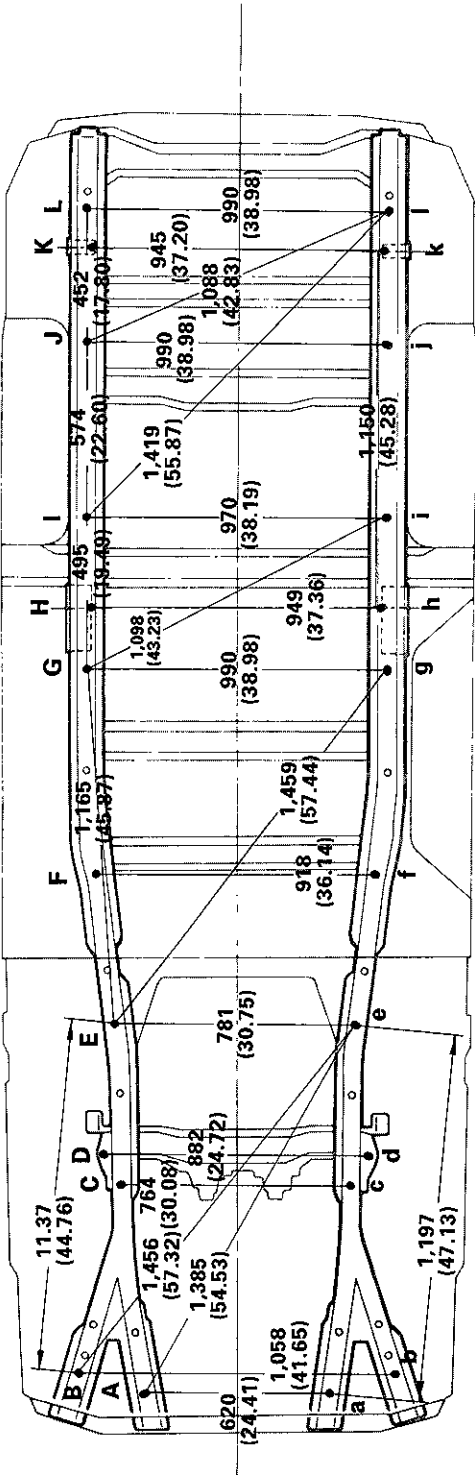

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	17 (0.67)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55) nut	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)



UNDER BODY (2WD : Short Wheel Base)

(Two-Dimensional Distance)

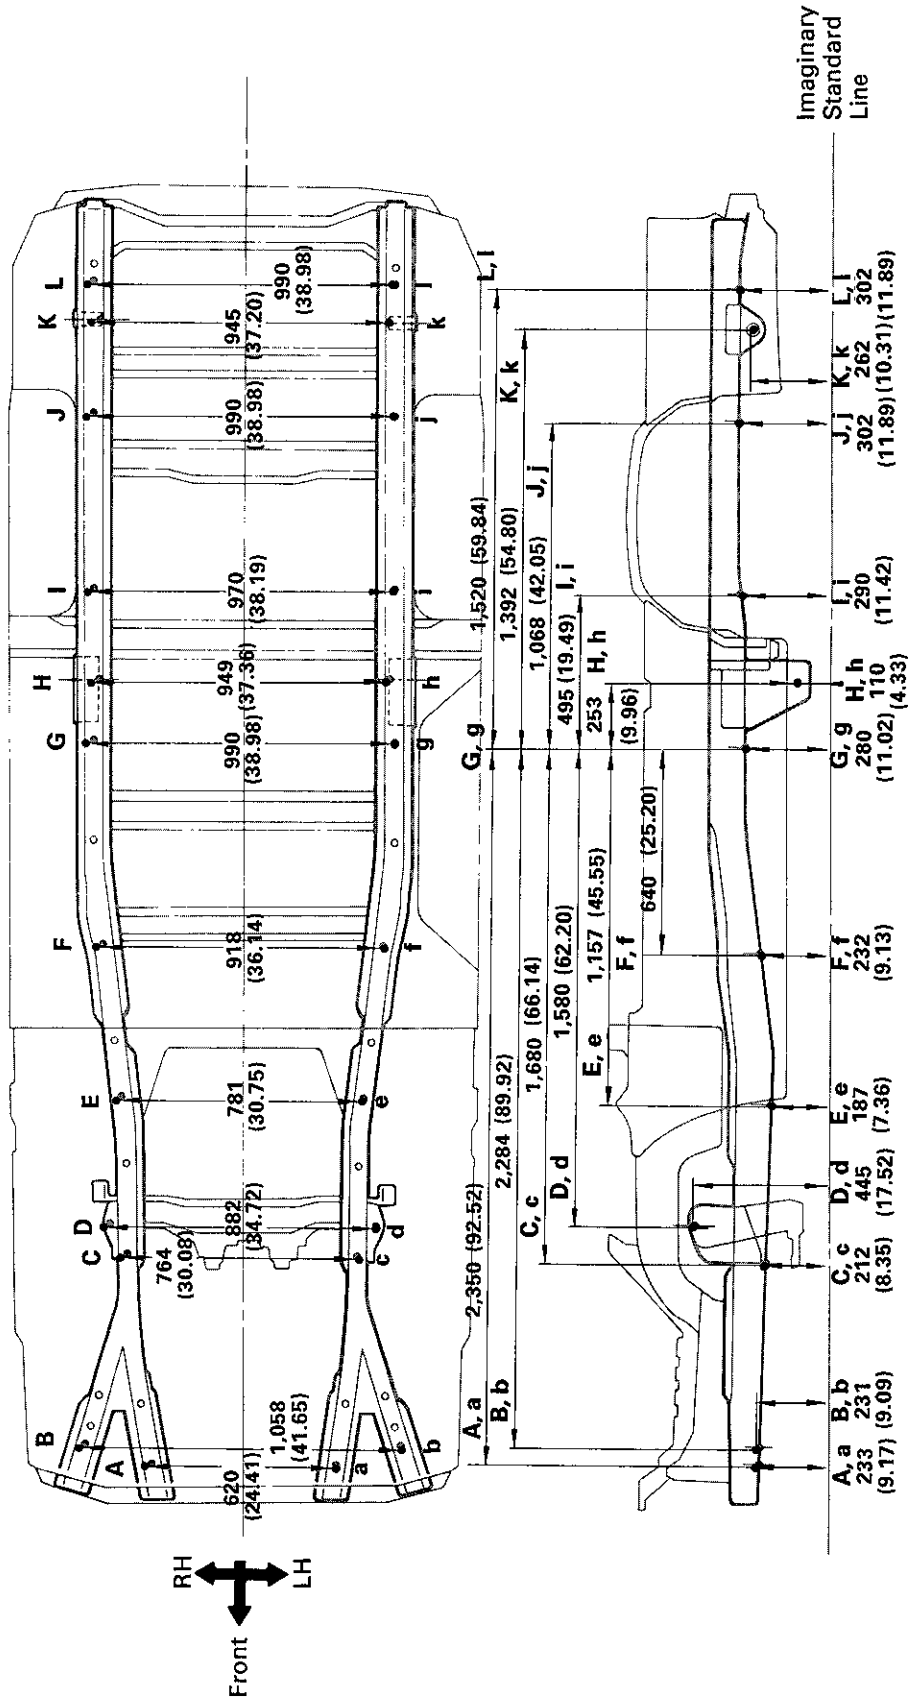

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	17 (0.67)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55) nut	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)


(Three-Dimensional Distance)

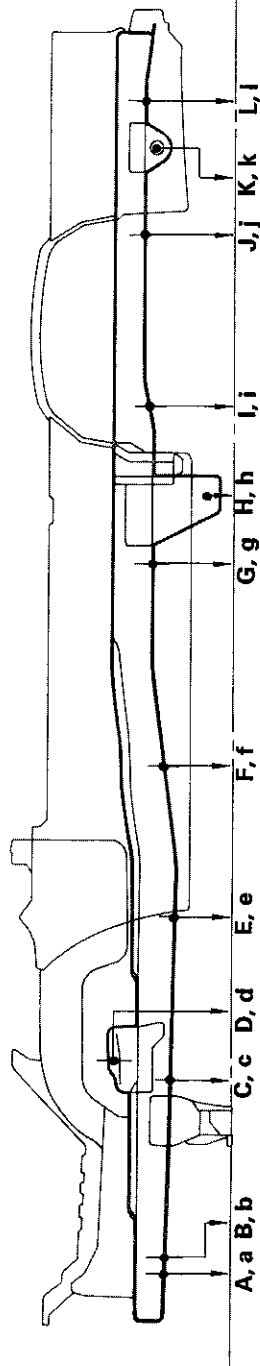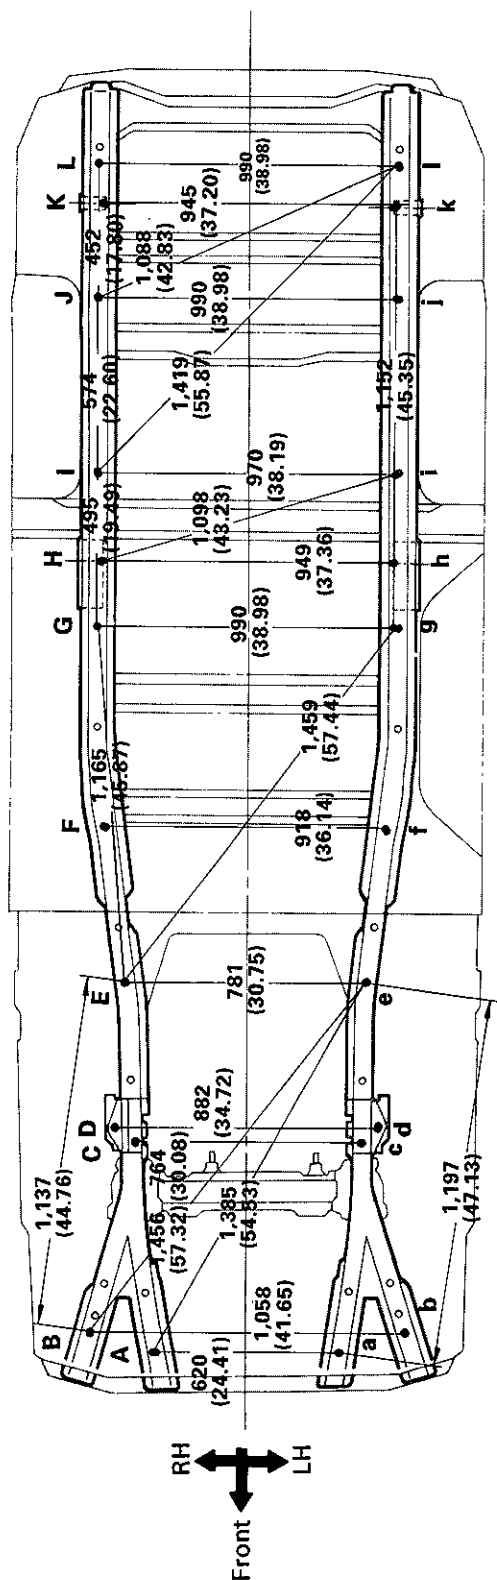

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	16 (0.63)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55) nut	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)

UNDER BODY (4WD : Short Wheel Base)

(Two-Dimensional Distance)



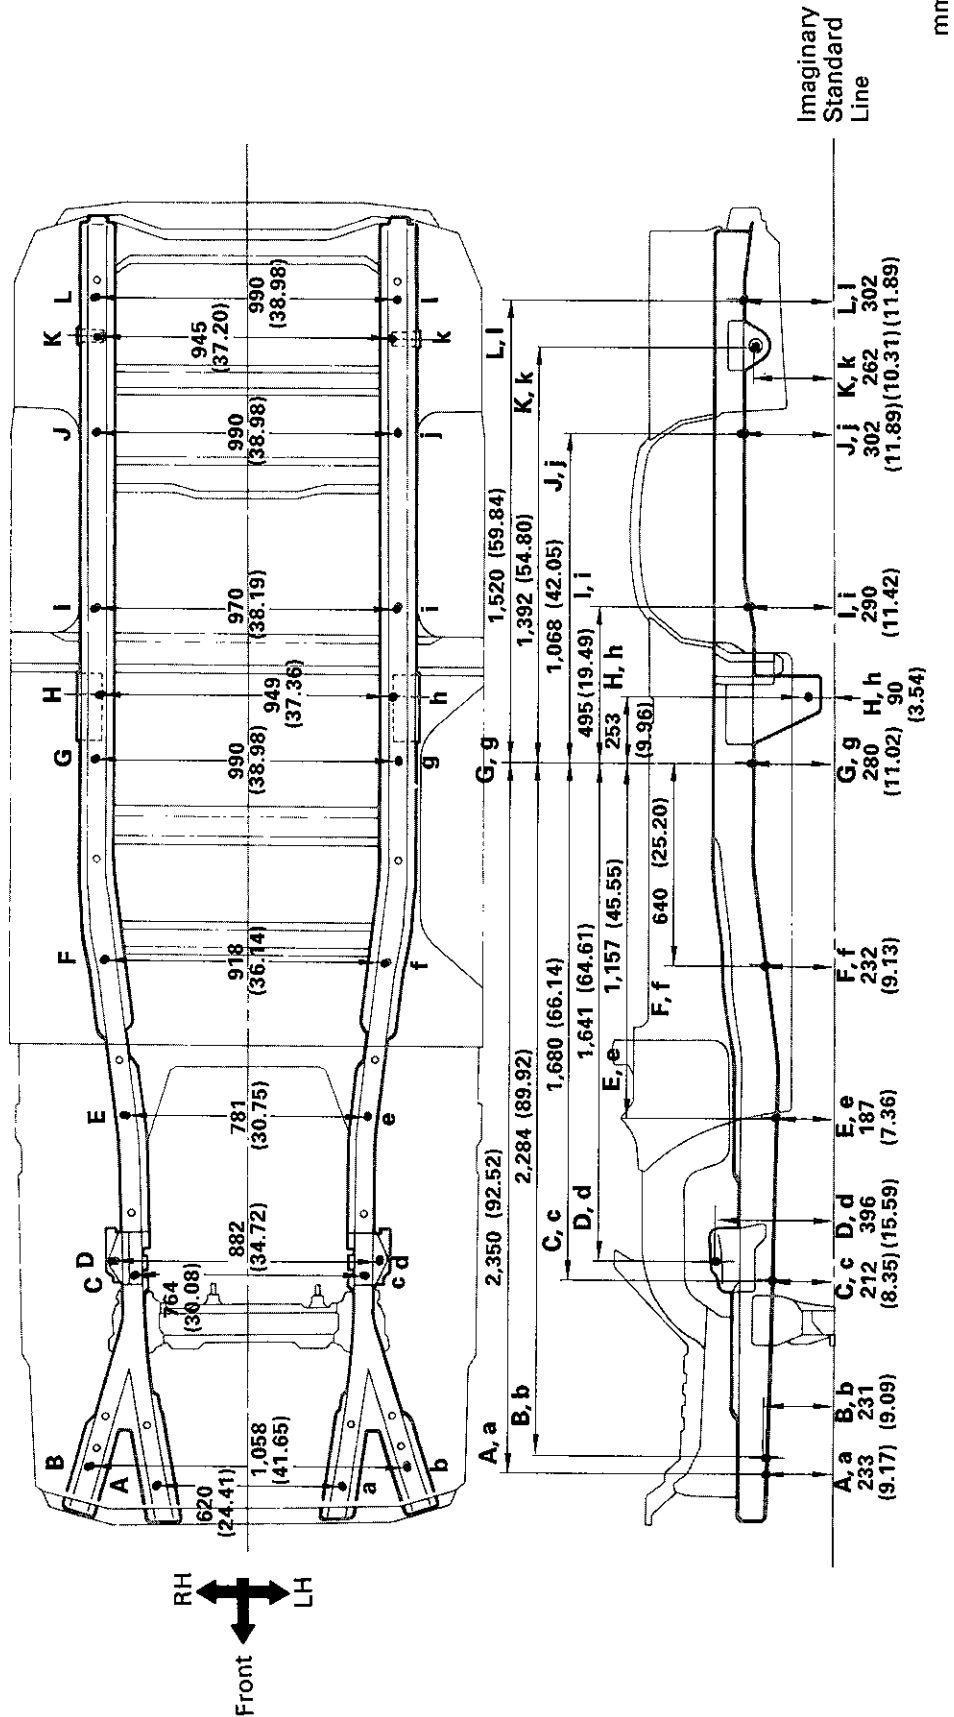


Symbol	Name	Symbol	Hole dia.	Name	Hole dia.
A, a	Front side member standard hole	G, g	15 (0.59)	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	H, h	15 (0.59)	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	I, i	15 (0.59)	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	J, j	16 (0.63)	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	K, k	14 (0.55) nut	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	L, l	15 (0.59)	Rear side member standard hole	15 (0.59)

Wheel base 2,330 (91.73)

UNDER BODY (2WD : Long Wheel Base)


(Three-Dimensional Distance)

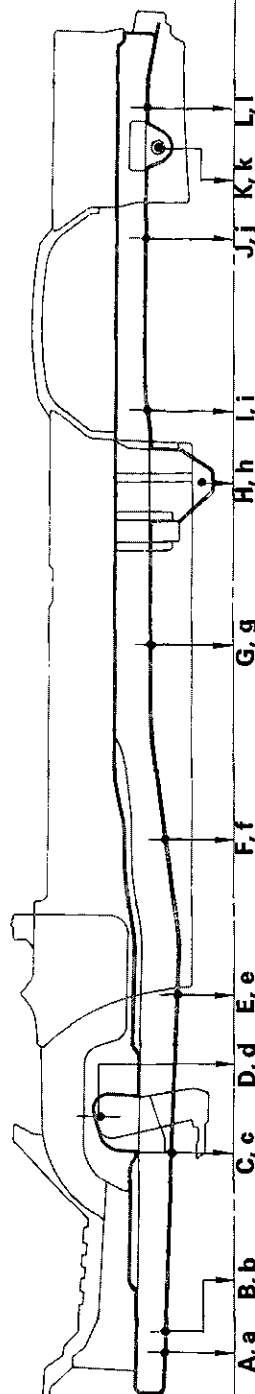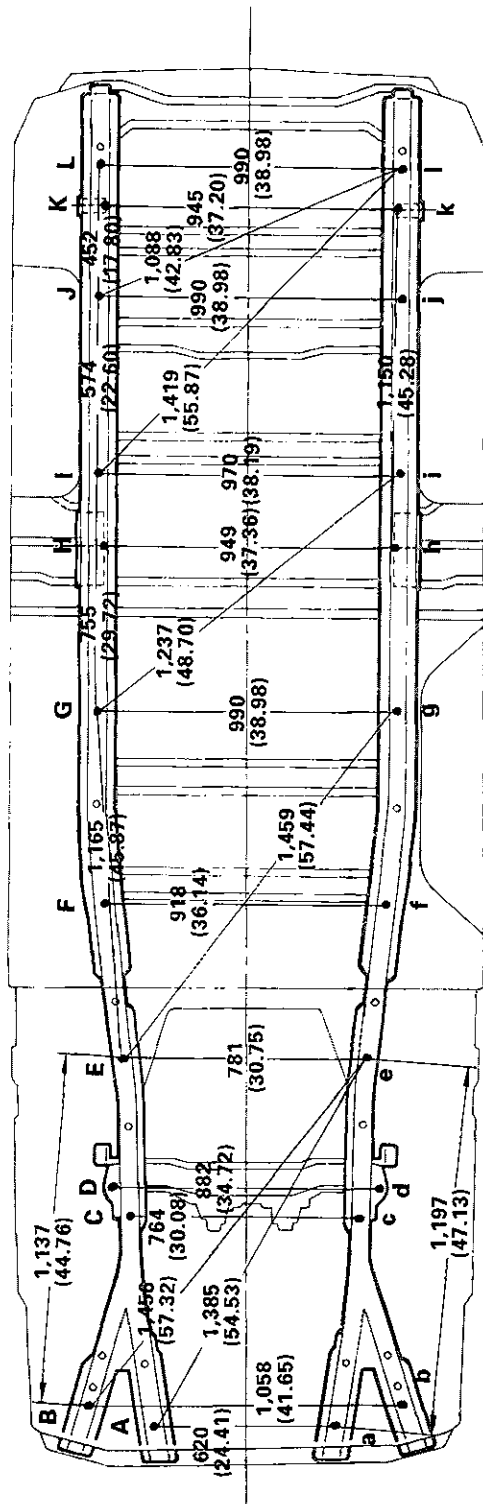

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	17 (0.67)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55) nut	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)

UNDER BODY (2WD : Long Wheel Base)



(Two-Dimensional Distance)

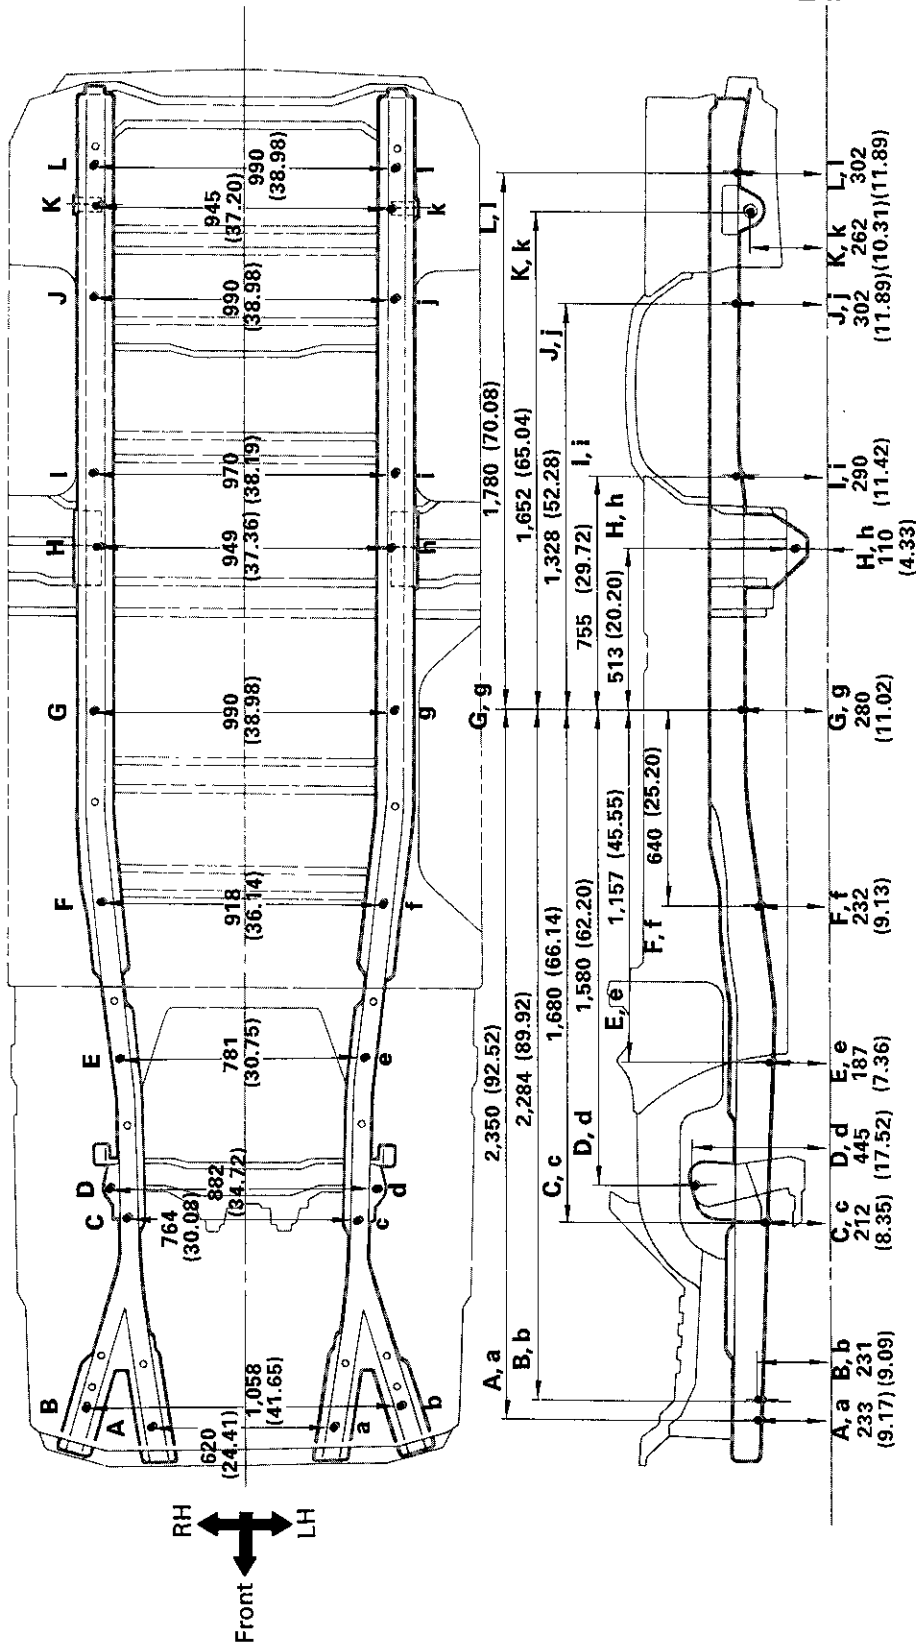

BO4433

UNDER BODY (4WD : Long Wheel Base)

(Three-Dimensional Distance)

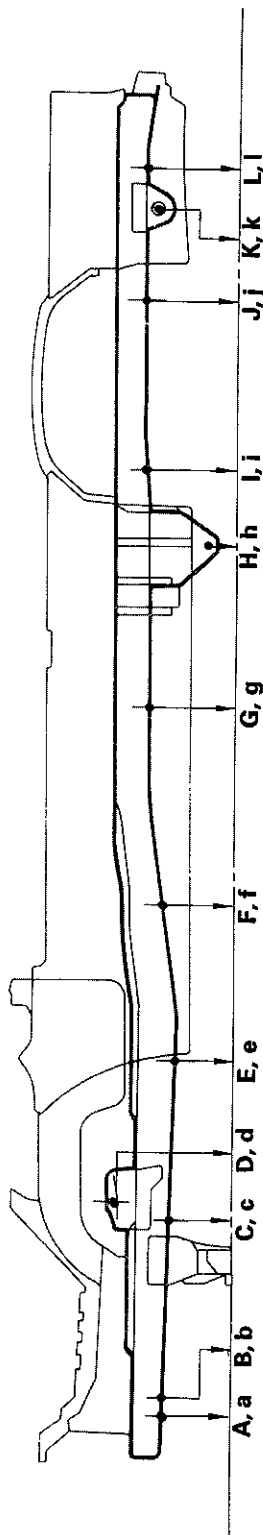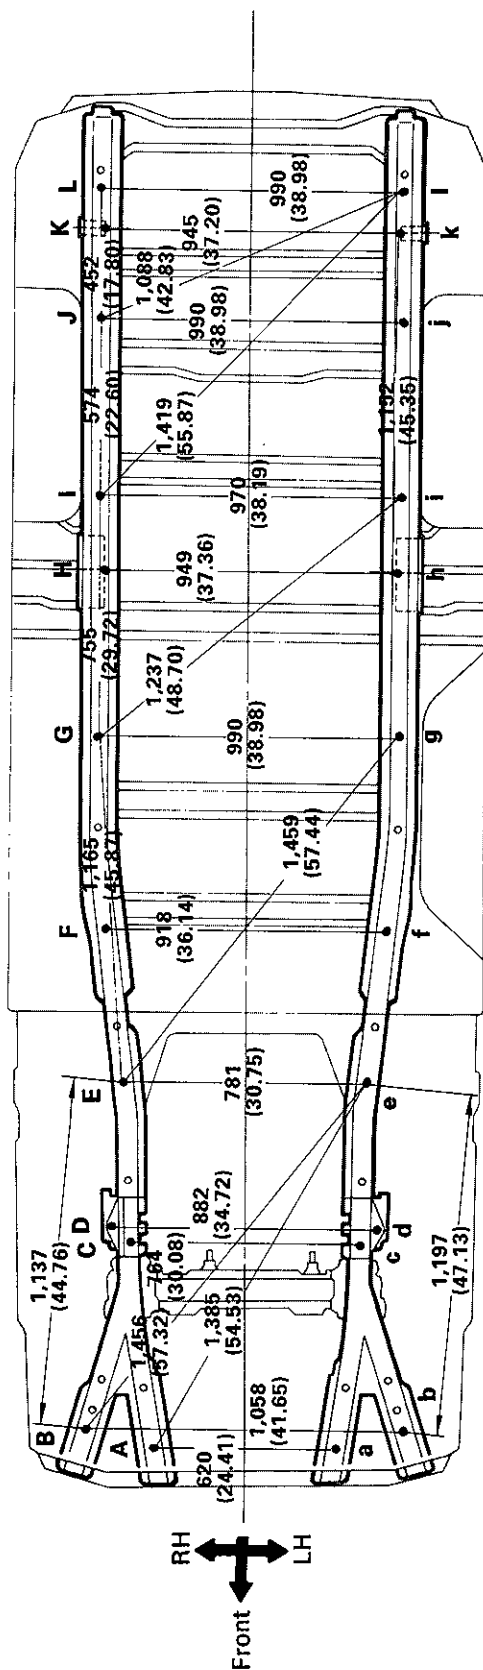


mm (in.)

Symbol	Name	Symbol	Name	Hole dia.	Hole dia.
A, a	Front side member standard hole	G, g	Front side member working hole	15 (0.59)	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	H, h	Rear spring installation hole-inner	15 (0.59)	14.5 (0.571)
C, c	Front side member working hole	I, i	Rear side member standard hole	15 (0.59)	15 (0.59)
D, d	Shock absorber installation hole	J, j	Rear side member working hole	16 (0.63)	15 (0.59)
E, e	Engine support member installation nut	K, k	Rear spring installation hole-inner	14 (0.55) nut	30 (1.18)
F, f	Front side member standard hole	L, l	Rear side member standard hole	15 (0.59)	15 (0.59)

UNDER BODY (4WD : Long Wheel Base)



(Two-Dimensional Distance)

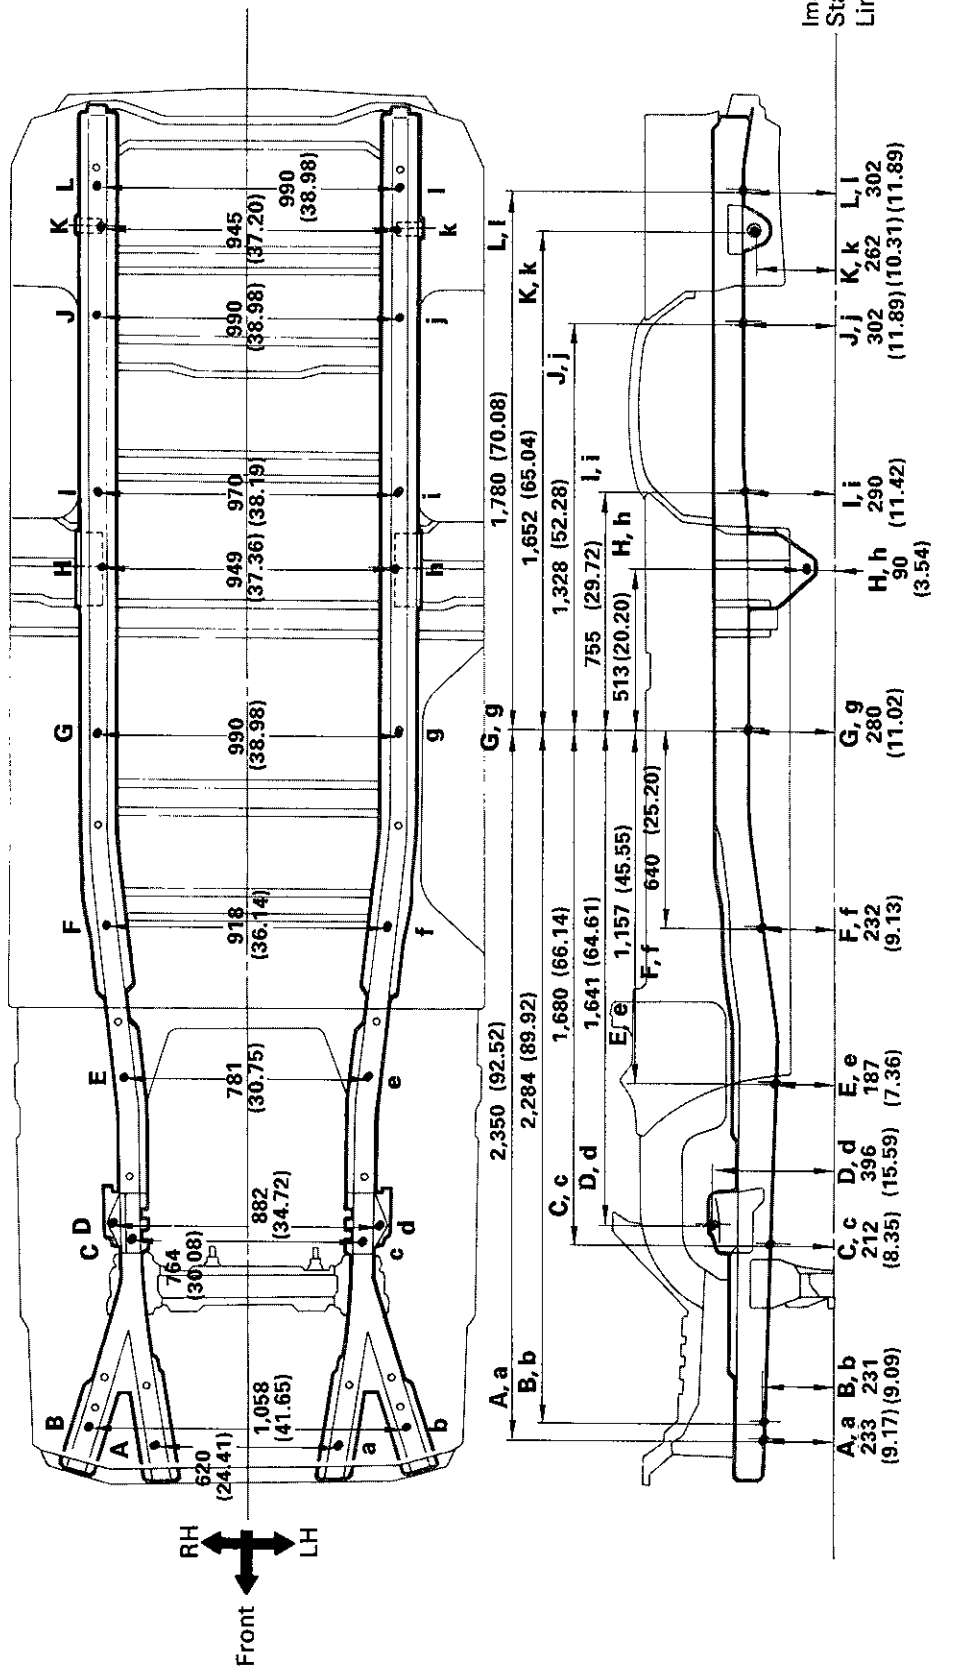

BO4434

UNDER BODY (2WD : Super Long Wheel Base)

(Three-Dimensional Distance)

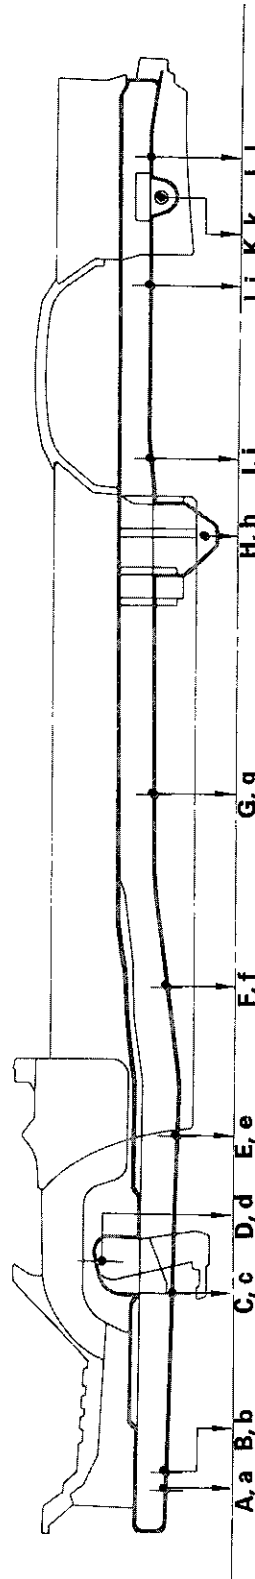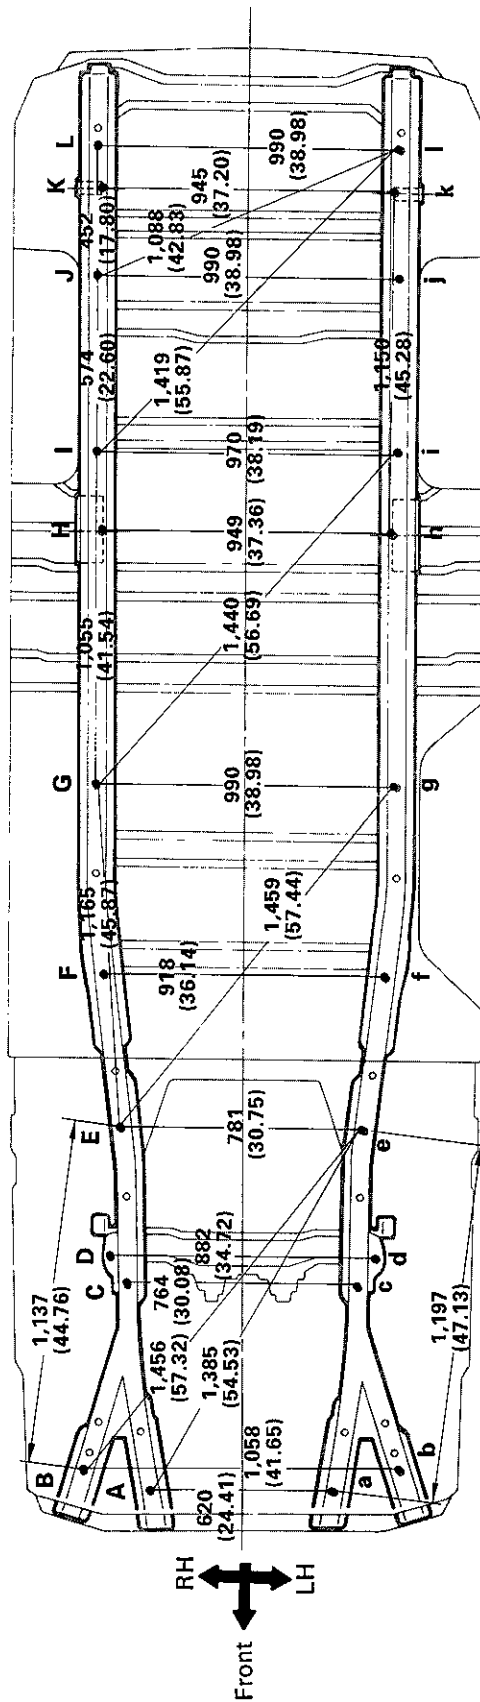


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front side member standard hole	15 (0.59)	G, g	Front side member working hole	20x15 (0.79x0.59)
B, b	Front side member outer standard hole	15 (0.59)	H, h	Rear spring installation hole-inner	14.5 (0.571)
C, c	Front side member working hole	15 (0.59)	I, i	Rear side member standard hole	15 (0.59)
D, d	Shock absorber installation hole	17 (0.67)	J, j	Rear side member working hole	15 (0.59)
E, e	Engine support member installation nut	14 (0.55) nut	K, k	Rear spring installation hole-inner	30 (1.18)
F, f	Front side member standard hole	15 (0.59)	L, l	Rear side member standard hole	15 (0.59)

UNDER BODY (2WD : Super Long Wheel Base)

(Two-Dimensional Distance)

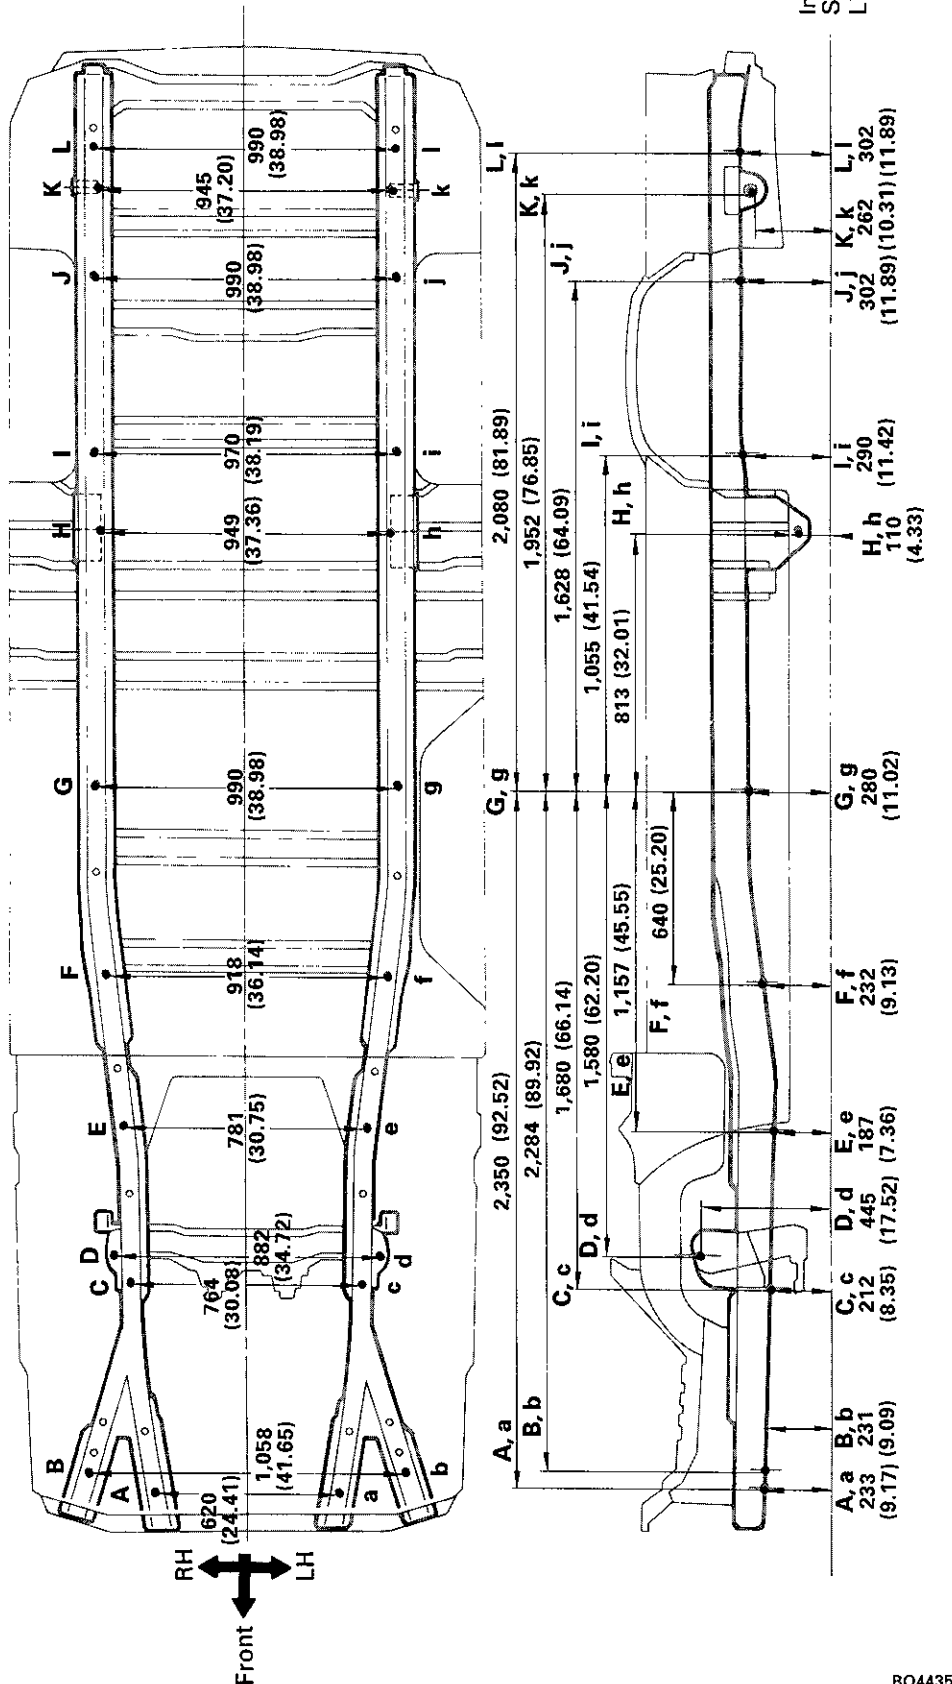

BO4435

