

CLOCK TROUBLESHOOTING


BE1CS-01

HINT:


Troubleshoot the clock according to the table below.

problem	No.
Clock will not operate	1
Clock loses or gains time	2

± 1.5 seconds / day

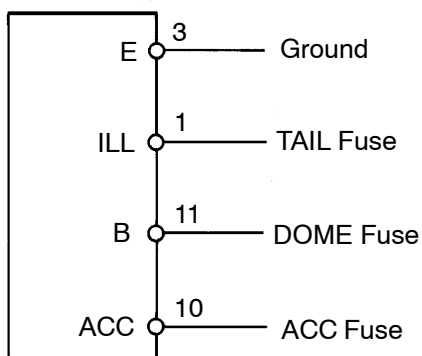

Wire Harness Side




I14919

PROBLEM No.1

1

CLOCK WILL NOT OPERATE

Wire Harness Side:




I14918

- Check that the battery positive voltage is 10 – 16 V. If voltage is not as specified, replace the battery.
- Check that the DOME fuse is not blown. If the fuse is blown, replace the fuse and check for short.
- Troubleshoot the clock as follows.

HINT:

Inspect the connector on the wire harness side.

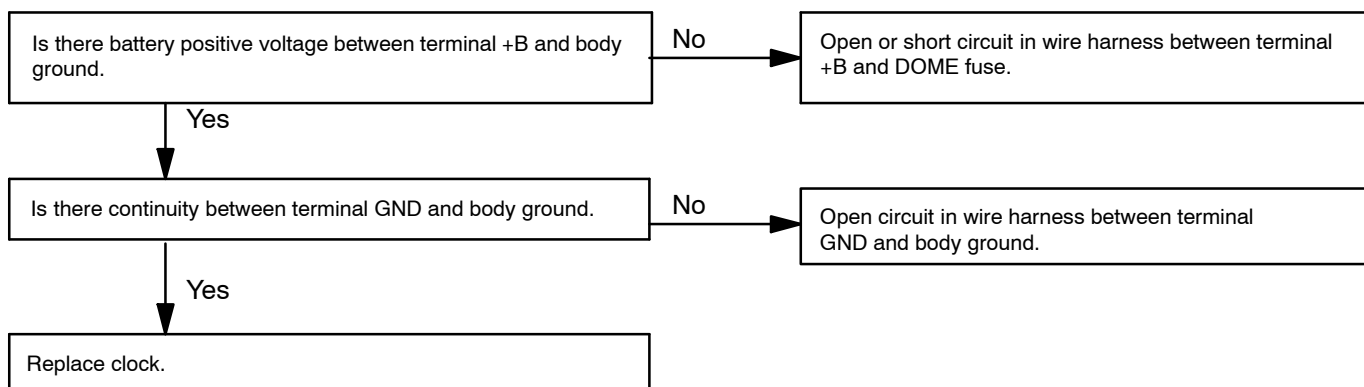


PROBLEM No.2

2

CLOCK LOSES OR GAINS TIME

Wire Harness Side:



I14918

(a) Check that the battery positive voltage is 10 – 16 V.
If voltage is not as specified, replace the battery.

(b) Inspect the error of the clock.

Allowable error (per day): ± 1.5 seconds

If the error exceeds the allowable error, replace the clock.

(c) Check that the clock adjusting button is sticking in position and has failed to return.

If the error exceeds the allowable error, replace the clock.

(d) Troubleshoot the clock as follows.

HINT:

Inspect the connector on the wire harness side.

